


# DIP FUSE

## QUICK ACTING FSE41

- Package: 100 Pcs/Bag
- 




\*1 : After passing the rated current through the fuse for 15 min, the current Is increased by 0,1 / N every 15 min until the fuse operates. while the current is being increased, the temperature rise at each part of the fuse shall not exceed 135K.

Rated Voltage	Rated Current (In)	Rated Breaking Current	Temp. Rise	Current Carrying Capacity	Overload Operation	Endurance Test
AC125V	200mA, 250mA, 315mA, 400mA, 500mA, 630mA	50A	* 1	1 / N	2 / N Within 5 Sec. 2.75 / N Within 0.3 Sec. 4 / N Within 0.03 Sec. 10 / N Within 0.004 Sec.	After passing 0,8 / N for 100 hours, 1 / N can be passed for 1 h Min.
DC125V	800mA, 1A, 1.25A, 1.6A, 2A, 2.5A, 3.15A, 4A, 5A					
AC125V	100mA ~ 5A	50A	Over 0.95	PF Over 0.95	2 / N Within 5 Sec.	
AC250V	100mA ~ 10A	100A	1 / N 75K Max.	1 / N until temp. stabilization occurs	2 / N Within 60 Sec.	—
DC125V		300A				

## INRUSH-WITHSTAND FSE42


- Package: 100 Pcs/Bag
- 

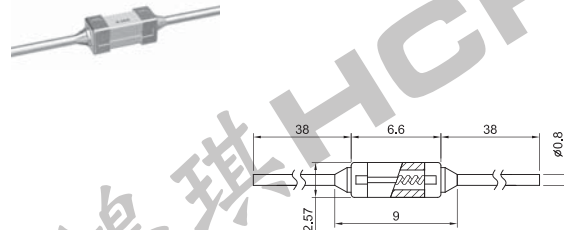

Rated Voltage	Rated Current (In)	Rated Breaking Current	Temp. Rise	Current Carrying Capacity	Overload Operation
AC125V	100mA ~ 5A	100A	1 / N 75K Max.	1 / N until temp. stabilization occurs	2 / N Within 60 Sec.
DC125V		300A			

## QUICK ACTING FSE51


- Package: 100 Pcs/Bag

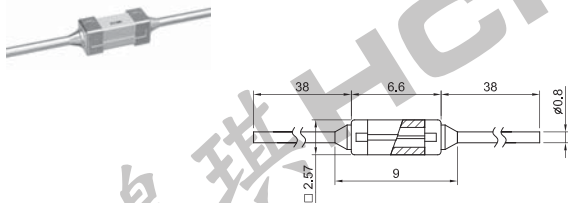

Rated Voltage	Rated Current (In)	Rated Breaking Current	Temp. Rise	Current Carrying Capacity	Overload Operation
AC90V	100mA ~ 10A	50A	1 / N 75K Max.	1 / N until temp. stabilization occurs	2 / N Within 60 Sec.
DC90V					

## INRUSH-WITHSTAND FSE52


- Package: 100 Pcs/Bag

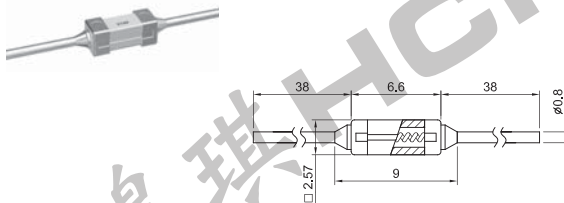

Rated Voltage	Rated Current (In)	Rated Breaking Current	Temp. Rise	Current Carrying Capacity	Overload Operation
AC90V	100mA ~ 6.3A	50A	1 / N 75K Max.	1 / N until temp. stabilization occurs	2 / N Within 60 Sec.
DC60V					

## QUICK ACTING FSE61


- Package: 100 Pcs/Bag

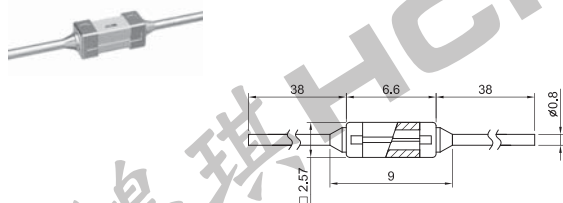

Rated Voltage	Rated Current (In)	Rated Breaking Current	Temp. Rise	Current Carrying Capacity	Overload Operation
DC35V	100mA ~ 10A	50A	1 / N 75K Max.	1 / N until temp. stabilization occurs	2 / N Within 60 Sec.

## INRUSH-WITHSTAND FSE62


- Package: 100 Pcs/Bag

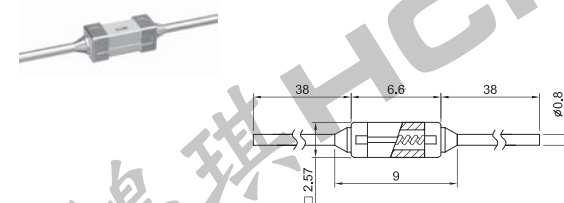

Rated Voltage	Rated Current (In)	Rated Breaking Current	Temp. Rise	Current Carrying Capacity	Overload Operation
DC35V	100mA ~ 6.3A	50A	1 / N 75K Max.	1 / N until temp. stabilization occurs	2 / N Within 60 Sec.

## QUICK ACTING FSE71


- Package: 100 Pcs/Bag
- 

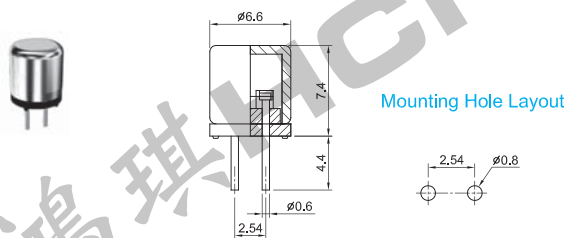

Rated Voltage	Rated Current (In)	Rated Breaking Current	Temp. Rise	Current Carrying Capacity	Overload Operation
AC125V	63mA ~ 5A	50A	1 / N 70K Max.	1 / N for 15 minutes or more after temp. stabilization occurs	1.5 / N Within 10 minutes 2 / N Within 60 Sec.
		100A			

## QUICK ACTING FSE72

- Package: 100 Pcs/Bag

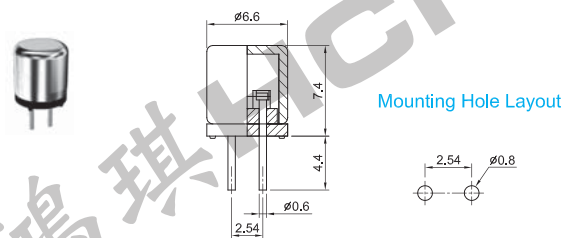

Rated Voltage	Rated Current (In)	Rated Breaking Current	Temp. Rise	Current Carrying Capacity	Overload Operation
AC90V	63mA ~ 5A	50A	1 / N 70K Max.	1 / N for 15 minutes or more after temp. stabilization occurs	1.5 / N Within 10 minutes 2 / N Within 60 Sec.