
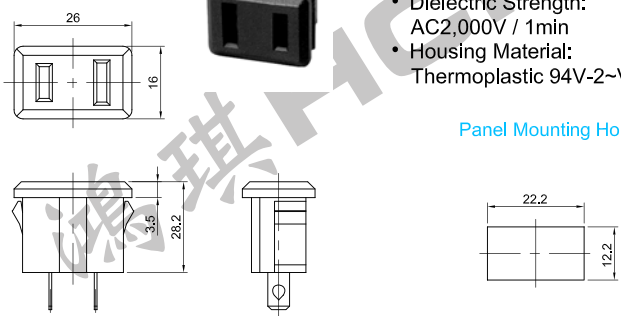

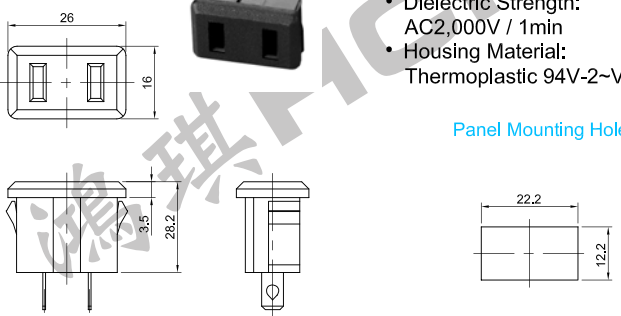

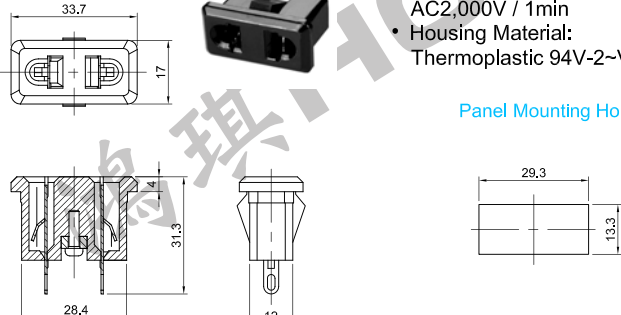

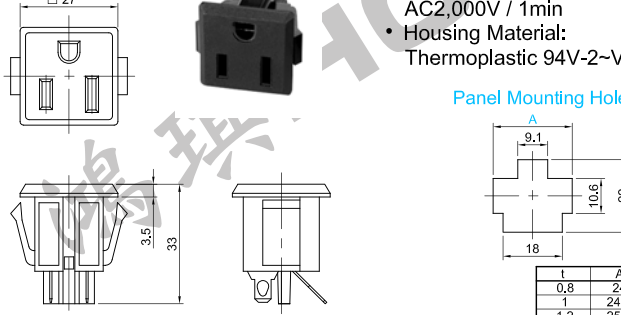

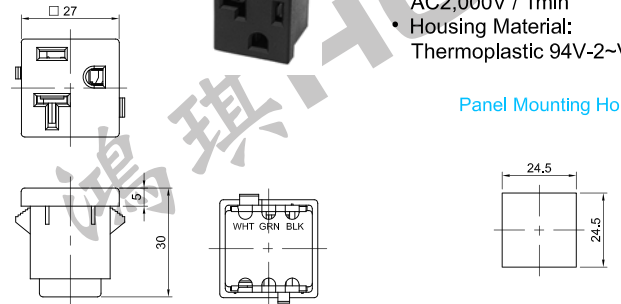

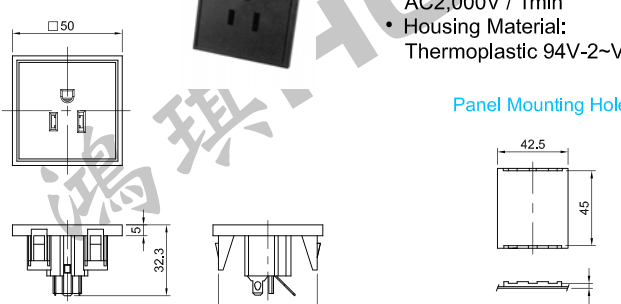

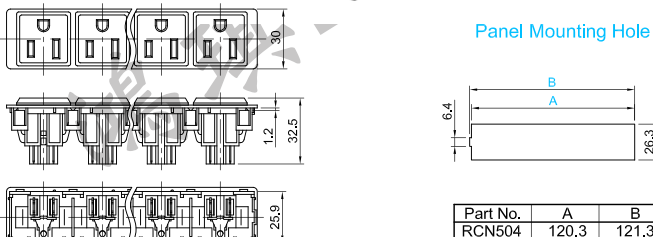

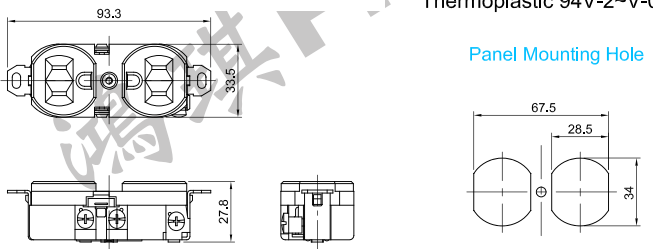


U.S. RECEPTACLE

<p>RCN201</p>  <ul style="list-style-type: none"> Standard: UL 498 Rating: AC125V 15A Insulation Resistance: 100MΩ DC500V / 1min Dielectric Strength: AC2,000V / 1min Housing Material: Thermoplastic 94V-2~V-0 <p>Panel Mounting Hole</p> 	<p>RCN202</p>  <ul style="list-style-type: none"> Standard: UL 498 Rating: AC125V 15A Insulation Resistance: 100MΩ DC500V / 1min Dielectric Strength: AC2,000V / 1min Housing Material: Thermoplastic 94V-2~V-0 <p>Panel Mounting Hole</p> 										
<p>RCN203</p>  <ul style="list-style-type: none"> Standard: US Receptacle Rating: AC125V 15A Insulation Resistance: 100MΩ DC500V / 1min Dielectric Strength: AC2,000V / 1min Housing Material: Thermoplastic 94V-2~V-0 <p>Panel Mounting Hole</p> 	<p>RCN301</p>  <ul style="list-style-type: none"> Standard: UL 498 Rating: AC125V 15A Insulation Resistance: 100MΩ DC500V / 1min Dielectric Strength: AC2,000V / 1min Housing Material: Thermoplastic 94V-2~V-0 <p>Panel Mounting Hole</p>  <table border="1" data-bbox="1364 1075 1476 1153"> <thead> <tr> <th>t</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>0.8</td> <td>24</td> </tr> <tr> <td>1</td> <td>24.6</td> </tr> <tr> <td>1.2</td> <td>25.2</td> </tr> <tr> <td>1.6</td> <td>26.2</td> </tr> </tbody> </table>	t	A	0.8	24	1	24.6	1.2	25.2	1.6	26.2
t	A										
0.8	24										
1	24.6										
1.2	25.2										
1.6	26.2										
<p>RCN302</p>  <ul style="list-style-type: none"> Standard: UL 498 Rating: AC125V 20A Insulation Resistance: 100MΩ DC500V / 1min Dielectric Strength: AC2,000V / 1min Housing Material: Thermoplastic 94V-2~V-0 <p>Panel Mounting Hole</p> 	<p>RCN303</p>  <ul style="list-style-type: none"> Standard: UL 498 Rating: AC125V 15A Insulation Resistance: 100MΩ DC500V / 1min Dielectric Strength: AC2,000V / 1min Housing Material: Thermoplastic 94V-2~V-0 <p>Panel Mounting Hole</p> 										
<p>RCN504 4 Sockets RCN505 5 Sockets</p>  <ul style="list-style-type: none"> Standard: US Receptacle Rating: AC125V 15A Insulation Resistance: 100MΩ DC500V / 1min Dielectric Strength: AC2,000V / 1min Housing Material: Thermoplastic 94V-2~V-0 <p>Panel Mounting Hole</p>  <table border="1" data-bbox="566 2038 790 2094"> <thead> <tr> <th>Part No.</th> <th>A</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>RCN504</td> <td>120.3</td> <td>121.3</td> </tr> <tr> <td>RCN505</td> <td>150.3</td> <td>151.3</td> </tr> </tbody> </table>	Part No.	A	B	RCN504	120.3	121.3	RCN505	150.3	151.3	<p>RCN601 2 Sockets</p>  <ul style="list-style-type: none"> Standard: UL 498 Rating: AC125V 15A Insulation Resistance: 100MΩ DC500V / 1min Dielectric Strength: AC2,000V / 1min Housing Material: Thermoplastic 94V-2~V-0 <p>Panel Mounting Hole</p> 	
Part No.	A	B									
RCN504	120.3	121.3									
RCN505	150.3	151.3									