PUSH SWITCHES

PTS-073 SPST OFF-(ON)
(ON)=Momentary

- Rating: DC 24V 50mA
- Stroke: 1mm
- Force: 95±30gf
- Life: 200,000 Cycles

Knob	Code	Knob	Code
Black	010	Blue	015
Red	011	Yellow	016
White	012	Orange	018
Gray	013	Clear	020
Green	014		

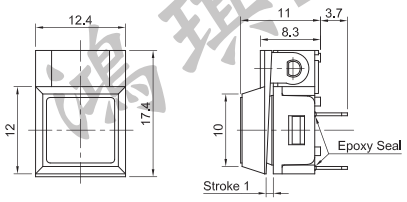

Mounting Hole Layout



PTS-074 SPST OFF-(ON)
(ON)=Momentary

- Rating: DC 24V 50mA
- Strock: 1mm
- Force: 95±30gf
- Life: 200,000 Cycles

Knob	Code	Knob	Code
Black	010	Blue	015
Red	011	Yellow	016
White	012	Orange	018
Gray	013	Clear	020
Green	014		

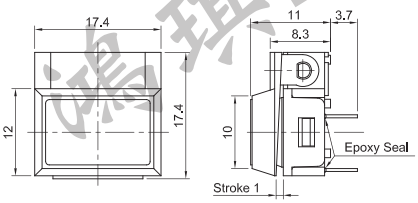

Mounting Hole Layout



WITH 1 LED TYPE
PTS-075 SPST OFF-(ON)
(ON)=Momentary

- Rating: DC 24V 50mA
- Stroke: 1mm
- Force: 95±30gf
- Life: 200,000 Cycles

PTS-075-L2	Red
PTS-075-L5	Green
PTS-075-L8	Yellow

Knob	Code	Knob	Code
Black	010	Blue	015
Red	011	Yellow	016
White	012	Orange	018
Gray	013	Clear	020
Green	014		

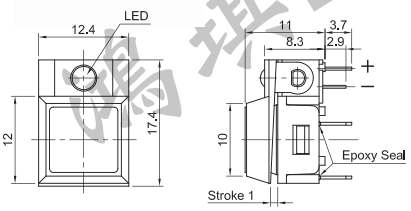

Mounting Hole Layout



WITH 1 LED TYPE
PTS-076 SPST OFF-(ON)
(ON)=Momentary

- Rating: DC 24V 50mA
- Stroke: 1mm
- Force: 95±30gf
- Life: 200,000 Cycles

PTS-076-L2	Red
PTS-076-L5	Green
PTS-076-L8	Yellow

Knob	Code	Knob	Code
Black	010	Blue	015
Red	011	Yellow	016
White	012	Orange	018
Gray	013	Clear	020
Green	014		

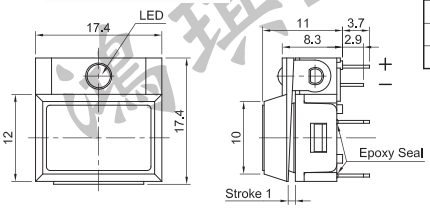

Mounting Hole Layout



WITH CLICK
SHAPE OF KNOB : ROUND
PTS-279 SPST OFF-(ON)
(ON)=Momentary

- Rating: AC125V 1A
- Force: 185±65gf
- Life: 30,000 Cycles

Knob	Code
Black	010
Red	011
White	012

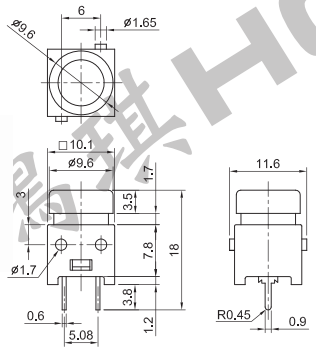

WITH CLICK
SHAPE OF KNOB : SQUARE
PTS-280 SPST OFF-(ON)
(ON)=Momentary

- Rating: AC125V 1A
- Force: 185±65gf
- Life: 30,000 Cycles

Knob	Code
Black	010
Red	011
White	012

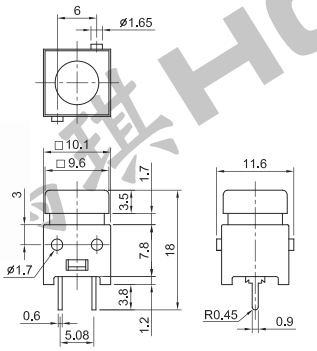

SNAP-IN TYPE (SOLDER TERMINAL) SPST
DS-435-S OFF-ON
DS-436-S OFF-(ON)
(ON)=Momentary

- Rating: AC125V 3A
  AC250V 1A
- Force: 275±75gf
- Life: 30,000 Cycles

Knob	Code
Black	010
Red	011
White	012



Panel Mounting Hole



Panel Thickness: 1.5~3.0mm

WITH ILLUMINATED
DPST
MS-800A2SLP OFF-ON
MS-800B2SLP OFF-(ON)
(ON)=Momentary

- Rating: DC30V 0.1A
- Force: 200±50gf
- Life: 50,000 Cycles

Part NO.	LED Color
MS-800□2SLP-L2	Red
MS-800□2SLP-L5	Green
MS-800□2SLP-L8	Yellow

□ = A,B



Panel Mounting Hole

Panel Thickness: 1.0~2.5mm