

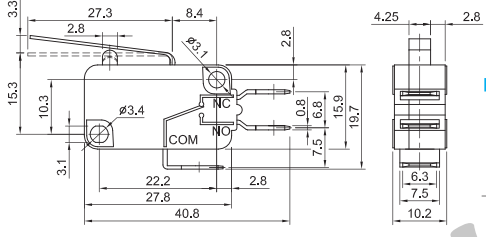


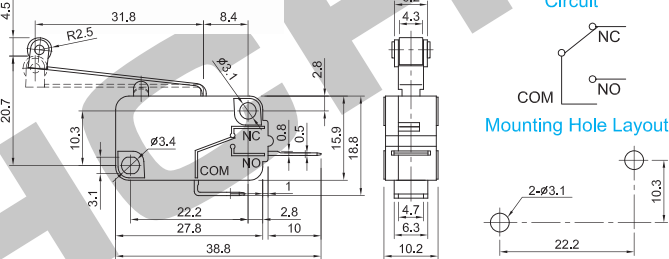


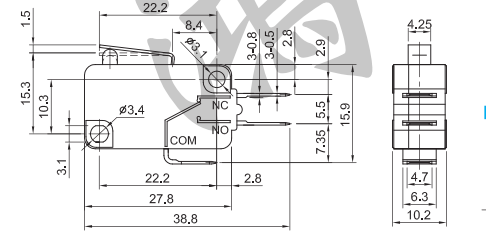


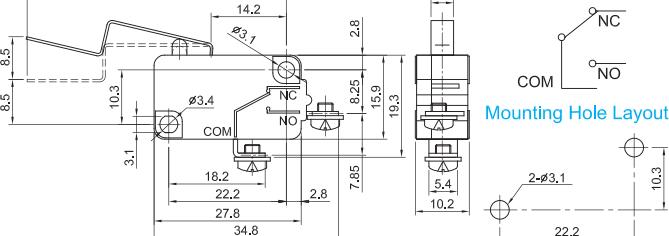


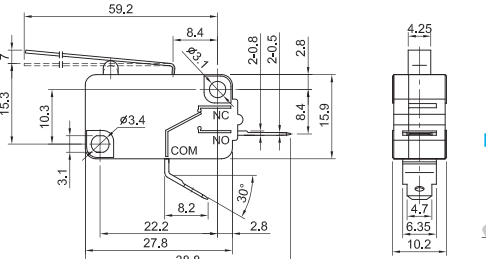


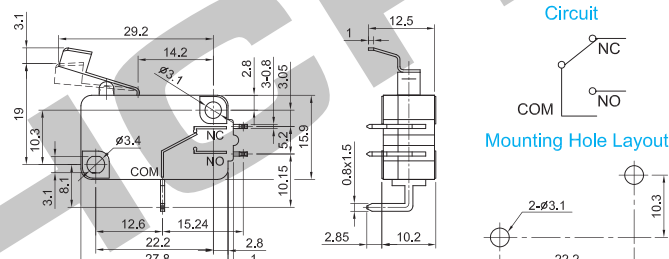


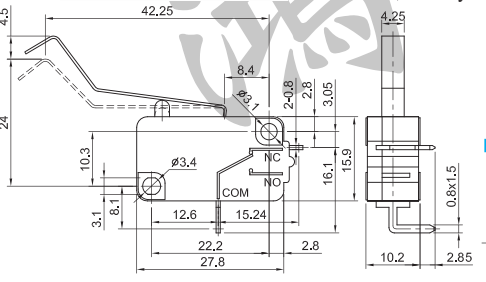




MICRO SWITCHES

<p>MQS-216S2AA</p>  <ul style="list-style-type: none"> Rating: AC125/250V 16A (UL, cUL) AC125/250V 16(4)A (ENEC, CQC) Force: 75±20gf Life: 6,000 Cycles (UL, cUL) 50,000 Cycles (ENEC, CQC) <p>Circuit</p>  <p>Mounting Hole Layout</p> 	<p>MQS-216SA5BC</p>  <ul style="list-style-type: none"> Rating: AC125/250V 16A DC125V 0.4A, DC250V 0.2A (UL, cUL) AC125/250V 16(4)A (ENEC, CQC) Force: 65±25gf Life: 6,000 Cycles (UL, cUL) 50,000 Cycles (ENEC, CQC) <p>Circuit</p>  <p>Mounting Hole Layout</p> 
<p>MQS-216TA01</p>  <ul style="list-style-type: none"> Rating: AC125/250V 16A DC125V 0.4A, DC250V 0.2A (UL, cUL) AC125/250V 16(4)A (ENEC, CQC) Force: 55±15gf Life: 6,000 Cycles (UL, cUL) 50,000 Cycles (ENEC, CQC) <p>Circuit</p>  <p>Mounting Hole Layout</p> 	<p>MQS-216TB07</p>  <ul style="list-style-type: none"> Rating: AC125/250V 16A DC125V 0.4A, DC250V 0.2A (UL, cUL) AC125/250V 16(4)A (ENEC, CQC) Force: 20±10gf Life: 6,000 Cycles (UL, cUL) 50,000 Cycles (ENEC, CQC) <p>Circuit</p>  <p>Mounting Hole Layout</p> 
<p>MQS-216TA04</p>  <ul style="list-style-type: none"> Rating: AC125/250V 16A DC125V 0.4A, DC250V 0.2A (UL, cUL) AC125/250V 16(4)A (ENEC, CQC) Force: 40±15gf Life: 6,000 Cycles (UL, cUL) 50,000 Cycles (ENEC, CQC) <p>Circuit</p>  <p>Mounting Hole Layout</p> 	<p>MQS-216TB10</p>  <ul style="list-style-type: none"> Rating: AC125/250V 16A DC125V 0.4A, DC250V 0.2A (UL, cUL) AC125/250V 16(4)A (ENEC, CQC) Force: 200±50gf Life: 6,000 Cycles (UL, cUL) 50,000 Cycles (ENEC, CQC) <p>Circuit</p>  <p>Mounting Hole Layout</p> 
<p>MQS-216TA17</p>  <ul style="list-style-type: none"> Rating: AC125/250V 16A DC125V 0.4A, DC250V 0.2A (UL, cUL) AC125/250V 16(4)A (ENEC, CQC) Force: 140±30gf Life: 6,000 Cycles (UL, cUL) 50,000 Cycles (ENEC, CQC) <p>Circuit</p>  <p>Mounting Hole Layout</p> 	<p>MQS-216TB12</p>  <ul style="list-style-type: none"> Rating: AC125/250V 16A DC125V 0.4A, DC250V 0.2A (UL, cUL) AC125/250V 16(4)A (ENEC, CQC) Force: 60±20gf Life: 6,000 Cycles (UL, cUL) 50,000 Cycles (ENEC, CQC) <p>Circuit</p>  <p>Mounting Hole Layout</p> 