




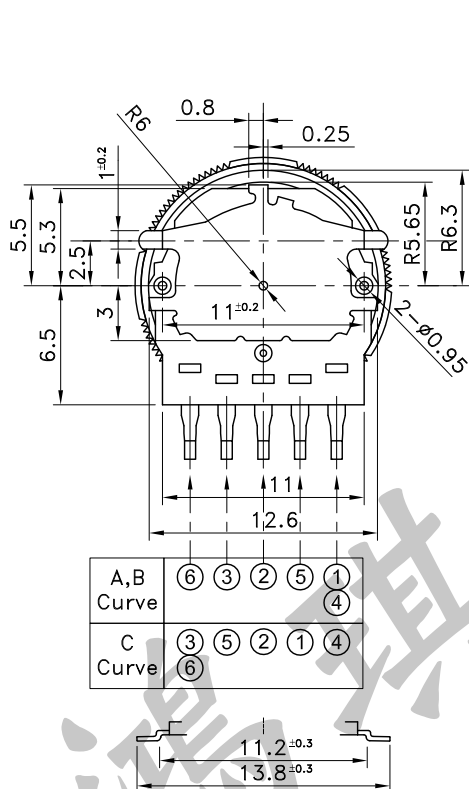



P.C.B TERMINAL POSITION

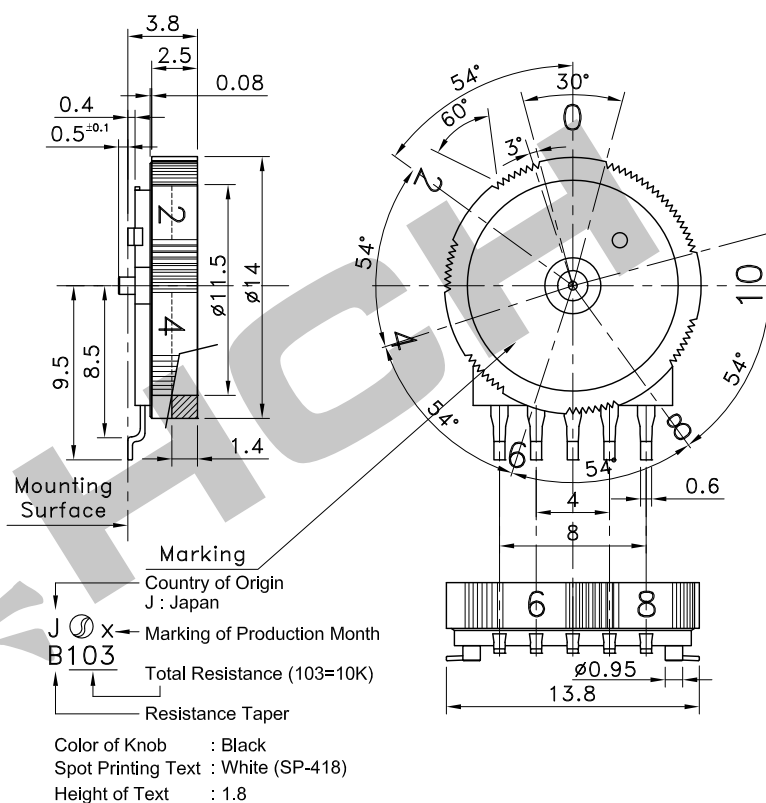

CIRCUIT ARRANGEMENT

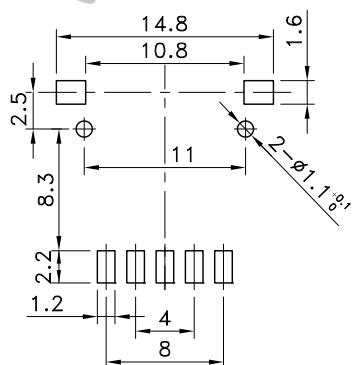

SOLDERING CONDITIONS

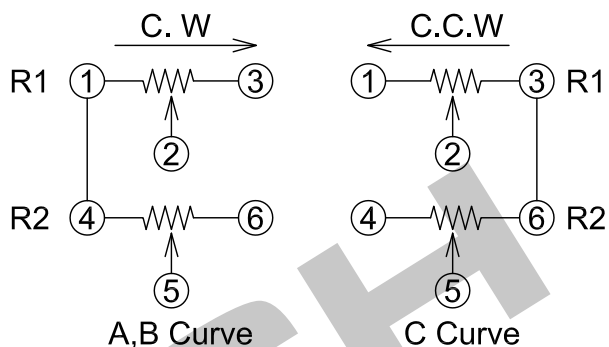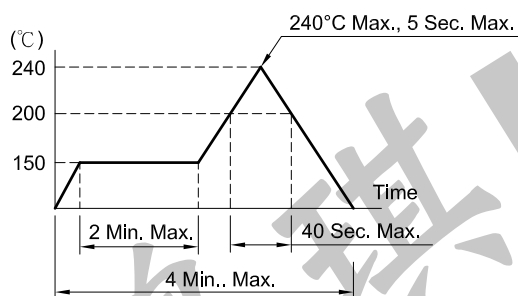

SPECIFICATIONS

- | | |
|---------------------------------|-------------------------|
| 1. Rated Power | : 0.05W |
| 2. Max. Rated Voltage | : AC 10V, DC 10V |
| 3. Total Resistance | : 5K~500KΩ±30% |
| 4. Insulation Resistance | : 100MΩ Min. at DC 100V |
| 5. Rotational Noise | : 100mV Max. |
| 6. Dielectric Strength | : AC 100V for 1 Minute |
| 7. Total Rotational Angle | : 270±5° |
| 8. Rotational Torque | : 5~100 gf · cm |
| 9. Rotation Stop Strength | : 1 Kgf · cm , 10±1Sec. |
| 10. Life | : 10,000 Cycles |
| 11. Taping | : 1,100 Pcs/Reel |
| 12. Operating Temperature Range | : -25~+70°C |

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED : ±0.3	CODE NO.:HCH-1358-3
ISSUED	CONFIRMED	PART NO.	
John	Elvis	HCH HORNG CHIH	
2013.07.24	2013.07.24	ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司	
		RVR14H-052	