


WATERPROOF CONNECTORS (IP67)


M5 PLUG REAR MOUNT / DIP WPM01

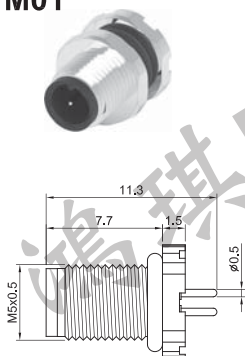

- Rating: AC/DC60V 1A
- Insertion Force: 0.8kgf Max.
- Extraction Force: 0.6kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPM01-02	2	Au 10u"
WPM01-03	3	Au 10u"
WPM01-04	4	Au 10u"


M5 RECEPTACLE FRONT MOUNT / SOLDER WPF01

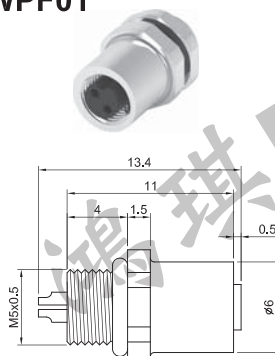

- Rating: AC/DC60V 1A
- Insertion Force: 0.8kgf Max.
- Extraction Force: 0.6kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPF01-02	2	Au 10u"
WPF01-03	3	Au 10u"
WPF01-04	4	Au 10u"


M5 PLUG CABLE END / SOLDER WPM02

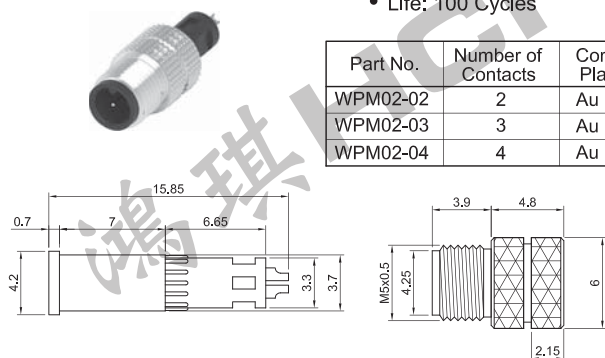

- Rating: AC/DC60V 1A
- Insertion Force: 0.8kgf Max.
- Extraction Force: 0.6kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPM02-02	2	Au 10u"
WPM02-03	3	Au 10u"
WPM02-04	4	Au 10u"


M5 RECEPTACLE CABLE END / SOLDER WPF02

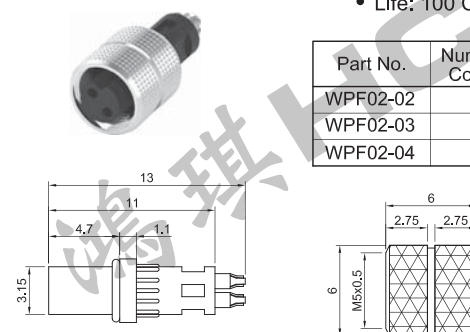

- Rating: AC/DC60V 1A
- Insertion Force: 0.8kgf Max.
- Extraction Force: 0.6kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPF02-02	2	Au 10u"
WPF02-03	3	Au 10u"
WPF02-04	4	Au 10u"


M8 PLUG REAR MOUNT / SOLDER WPM03

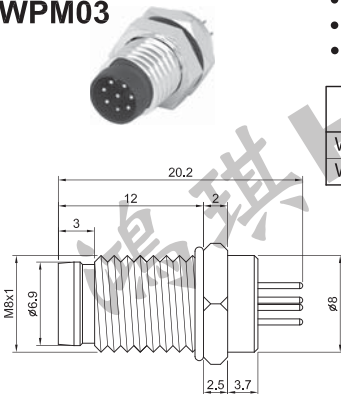

- Rating: AC50V/DC60V 3A (5 Pin)
AC/DC30V 1.5A (6 Pin)
- Insertion Force: 2.3kgf Max.
- Extraction Force: 2.3kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPM03-05	5	Au 10u"
WPM03-06	6	Au 10u"


M8 RECEPTACLE FRONT MOUNT / SOLDER WPF03

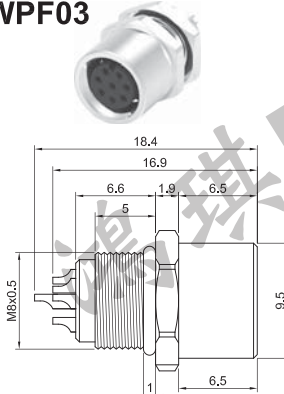

- Rating: AC50V/DC60V 3A (5 Pin)
AC/DC30V 1.5A (6,8 Pin)
- Insertion Force: 2.3kgf Max.
- Extraction Force: 2.3kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPF03-05	5	Au 10u"
WPF03-06	6	Au 10u"
WPF03-08	8	Au 10u"


M8 PLUG REAR MOUNT / SOLDER WPM04

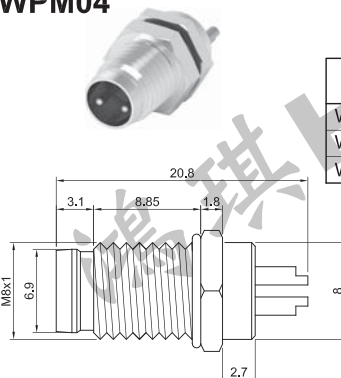

- Rating: AC50V/DC60V 3A
- Insertion Force: 2.3kgf Max.
- Extraction Force: 2.3kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPM04-02	2	Au 10u"
WPM04-03	3	Au 10u"
WPM04-04	4	Au 10u"

M5 RECEPTACLE FRONT MOUNT / SOLDER WPF04

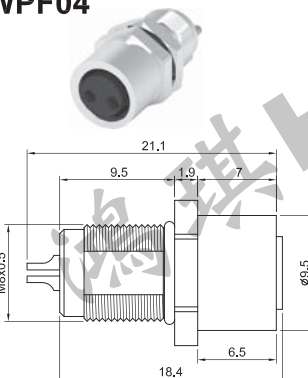

- Rating: AC50V/DC60V 3A
- Insertion Force: 2.3kgf Max.
- Extraction Force: 2.3kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPF04-02	2	Au 10u"
WPF04-03	3	Au 10u"
WPF04-04	4	Au 10u"