


WATERPROOF CONNECTORS (IP67)

M8 PLUG CABLE END / SOLDER WPM05

- Rating: AC50V/DC60V 3A (5 Pin)
AC/DC30V 1.5A (6,8 Pin)
- Insertion Force: 2.3kgf Max.
- Extraction Force: 2.3kgf Max.
- Life: 100 Cycles


Part No.	Number of Contacts	Contact Plating
WPM05-05	5	Au 10u"
WPM05-06	6	Au 10u"
WPM05-08	8	Au 10u"

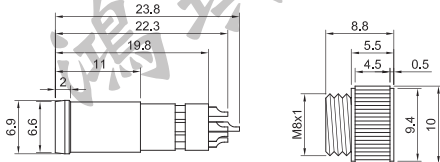

M8 RECEPTACLE CABLE END / SOLDER WPF05

- Rating: AC50V/DC60V 3A (5 Pin)
AC/DC30V 1.5A (6,8 Pin)
- Insertion Force: 2.3kgf Max.
- Extraction Force: 2.3kgf Max.
- Life: 100 Cycles


Part No.	Number of Contacts	Contact Plating
WPF05-05	5	Au 10u"
WPF05-06	6	Au 10u"
WPF05-08	8	Au 10u"

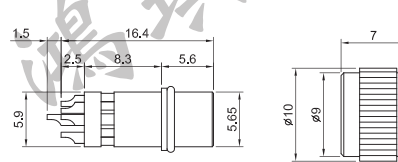

M8 PLUG CABLE END / SOLDER WPM06

- Rating: AC50V/DC60V 3A
- Insertion Force: 2.3kgf Max.
- Extraction Force: 2.3kgf Max.
- Life: 100 Cycles


Part No.	Number of Contacts	Contact Plating
WPM06-02	2	Au 10u"
WPM06-03	3	Au 10u"
WPM06-04	4	Au 10u"

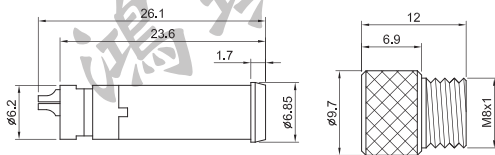

M8 RECEPTACLE CABLE END / SOLDER WPF06

- Rating: AC50V/DC60V 3A
- Insertion Force: 2.3kgf Max.
- Extraction Force: 2.3kgf Max.
- Life: 100 Cycles


Part No.	Number of Contacts	Contact Plating
WPF06-02	2	Au 10u"
WPF06-03	3	Au 10u"
WPF06-04	4	Au 10u"

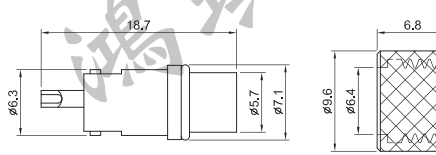

M12 PLUG REAR MOUNT / DIP WPM07

- Rating: AC/DC250V 4A (3,4 Pin)
AC/DC60V 2A (5 Pin)
AC/DC30V 2A (8 Pin)
AC/DC30V 1.5A (10,12 Pin)
- Insertion Force: 2.3kgf Max.
- Extraction Force: 3kgf Max.
- Life: 100 Cycles


Part No.	Number of Contacts	Contact Plating
WPM07-03	3	Au 10u"
WPM07-04	4	Au 10u"
WPM07-05	5	Au 10u"
WPM07-08	8	Au 10u"
WPM07-10	10	Au 10u"
WPM07-12	12	Au 10u"



M12 RECEPTACLE REAR MOUNT / DIP WPF07

- Rating: AC/DC250V 4A (3,4 Pin)
AC/DC60V 2A (5 Pin)
AC/DC30V 2A (6,8 Pin)
AC/DC30V 1.5A (12 Pin)
- Insertion Force: 2.3kgf Max.
- Extraction Force: 3kgf Max.
- Life: 100 Cycles


Part No.	Number of Contacts	Contact Plating
WPF07-03	3	Au 10u"
WPF07-04	4	Au 10u"
WPF07-05	5	Au 10u"
WPF07-06	6	Au 10u"
WPF07-08	8	Au 10u"
WPF07-12	12	Au 10u"



M12 PLUG CABLE END / SOLDER WPM08

- Rating: AC/DC250V 4A (2,3,4 Pin)
AC/DC60V 2A (5 Pin)
- Insertion Force: 2.3kgf Max.
- Extraction Force: 3kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPM08-02	2	Au 10u"
WPM08-03	3	Au 10u"
WPM08-04	4	Au 10u"
WPM08-05	5	Au 10u"

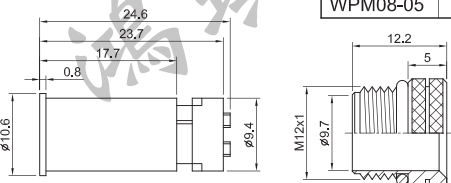

M12 RECEPTACLE CABLE END / SOLDER WPF08

- Rating: AC/DC250V 4A
- Insertion Force: 2.3kgf Max.
- Extraction Force: 3kgf Max.
- Life: 100 Cycles

Part No.	Number of Contacts	Contact Plating
WPF08-02	2	Au 10u"
WPF08-03	3	Au 10u"
WPF08-04	4	Au 10u"

