

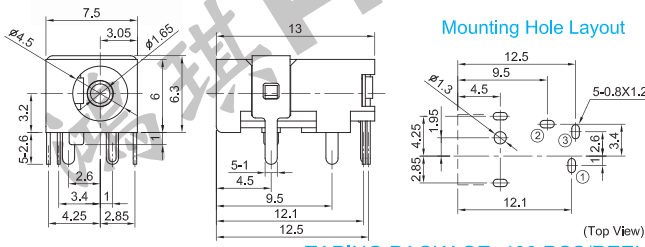


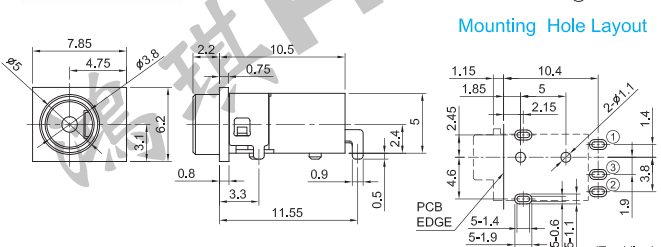


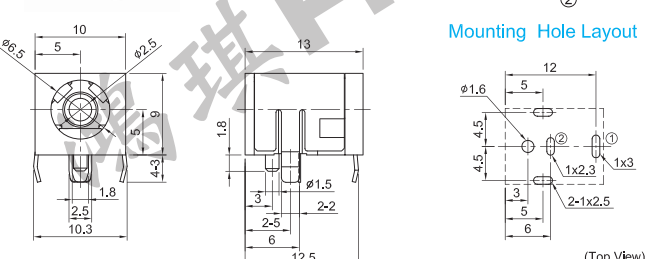


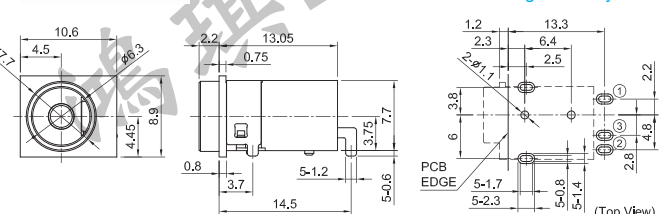


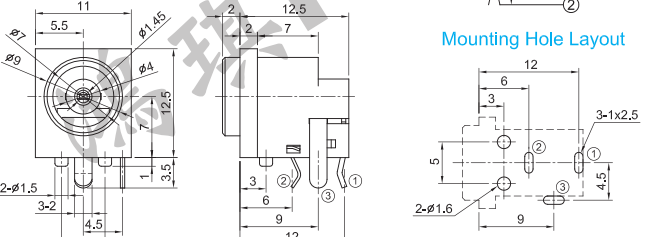


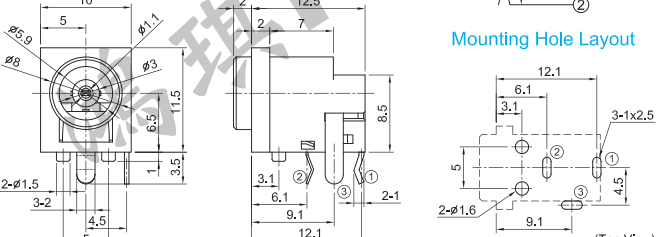


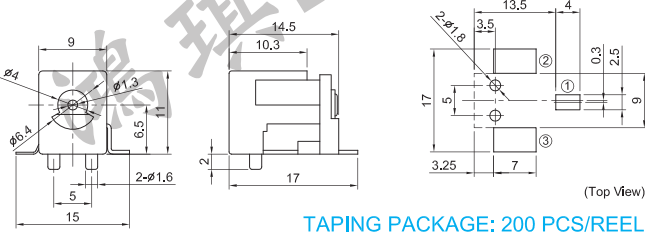


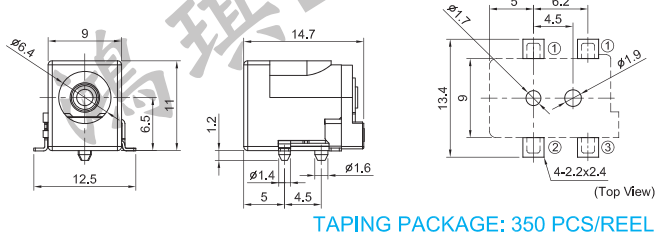


# DC POWER JACKS

<p><b>WITH BRACKET</b> <b>PJ-58 CENTER PIN : <math>\phi 1.65</math></b></p> <ul style="list-style-type: none"> <li>• Rating: DC16V 5A Max.</li> <li>• Force: 0.3~3.0kgf</li> <li>• Life: 5,000 Cycles</li> </ul>  <p><b>Circuit</b></p>  <p><b>Mounting Hole Layout</b></p>  <p>(Top View)</p> <p>TAPING PACKAGE: 400 PCS/REEL</p>	<p><b>WATER PROOF</b> <b>PJ-86 CENTER PIN : <math>\phi 1.3</math></b></p> <ul style="list-style-type: none"> <li>• Rating: DC16V 3.5A</li> <li>• Force: 0.3~3.0kgf</li> <li>• Life: 5,000 Cycles</li> </ul>  <p><b>Circuit</b></p>  <p><b>Mounting Hole Layout</b></p>  <p>(Top View)</p>
<p><b>PJ-87 CENTER PIN : <math>\phi 2.5</math></b></p> <ul style="list-style-type: none"> <li>• Rating: DC16V 8A</li> <li>• Force: 0.3~3.0kgf</li> <li>• Life: 5,000 Cycles</li> </ul>  <p><b>Circuit</b></p>  <p><b>Mounting Hole Layout</b></p>  <p>(Top View)</p>	<p><b>HIGH CURRENT WATER &amp; DUST PROOF</b> <b>PJ-93 CENTER PIN : <math>\phi 2.0</math></b></p> <ul style="list-style-type: none"> <li>• Rating: DC16V 5A</li> <li>• Force: 0.3~3.0kgf</li> <li>• Life: 5,000 Cycles</li> </ul>  <p><b>Circuit</b></p>  <p><b>Mounting Hole Layout</b></p>  <p>(Top View)</p>
<p><b>PJ-92</b></p> <ul style="list-style-type: none"> <li>• Rating: DC24V 3A Max.</li> <li>• Force: 0.3~3.0kgf</li> <li>• Life: 5,000 Cycles</li> </ul>  <p><b>Circuit</b></p>  <p><b>Mounting Hole Layout</b></p>  <p>(Top View)</p>	<p><b>PJ-97</b></p> <ul style="list-style-type: none"> <li>• Rating: DC24V 3A Max.</li> <li>• Force: 0.3~3.0kgf</li> <li>• Life: 5,000 Cycles</li> </ul>  <p><b>Circuit</b></p>  <p><b>Mounting Hole Layout</b></p>  <p>(Top View)</p>
<p><b>PJK-147 CENTER PIN : <math>\phi 1.3</math></b></p> <ul style="list-style-type: none"> <li>• Rating: DC30V 1A</li> <li>• Force: 0.3~3.0kgf</li> <li>• Life: 5,000 Cycles</li> </ul>  <p><b>Circuit</b></p>  <p><b>Pad Layout</b></p>  <p>(Top View)</p> <p>TAPING PACKAGE: 200 PCS/REEL</p>	<p><b>PJK-148 CENTER PIN : <math>\phi 2.0</math></b> <b>PJK-149 CENTER PIN : <math>\phi 2.5</math></b></p> <ul style="list-style-type: none"> <li>• Rating: DC20V 5A</li> <li>• Force: 0.3~3.0kgf</li> <li>• Life: 5,000 Cycles</li> </ul>  <p><b>Circuit</b></p>  <p><b>Pad Layout</b></p>  <p>(Top View)</p> <p>TAPING PACKAGE: 350 PCS/REEL</p>