

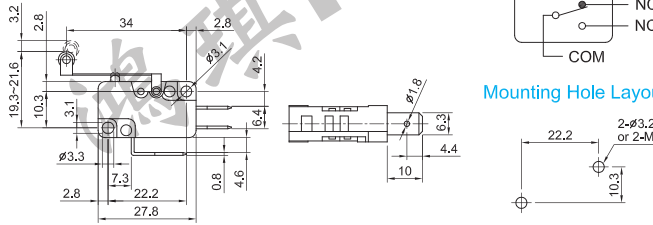


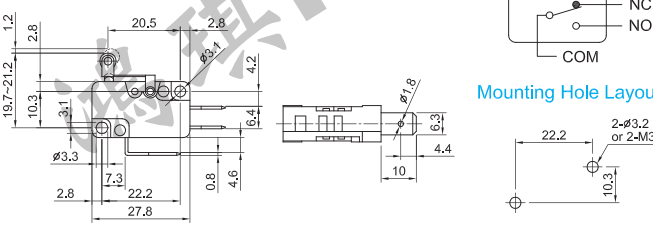


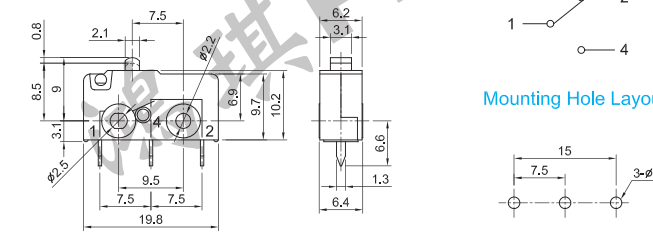


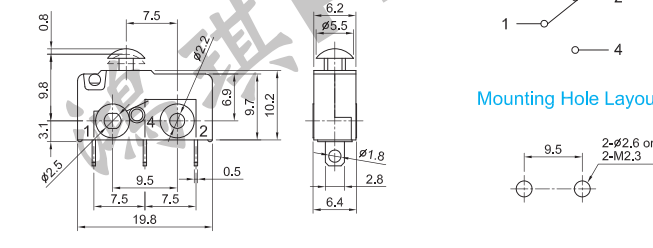


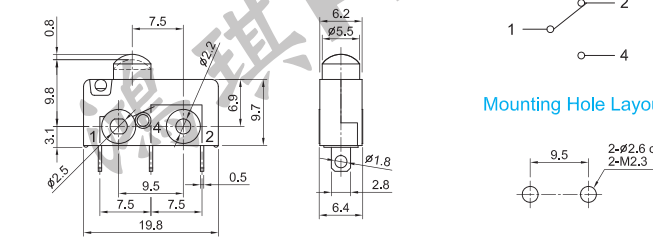


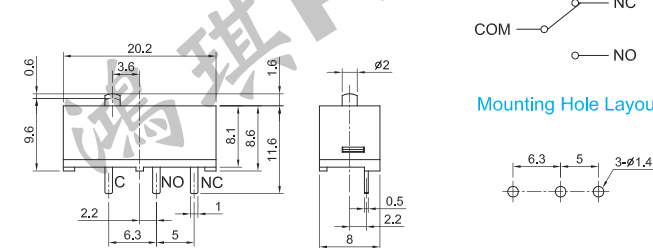


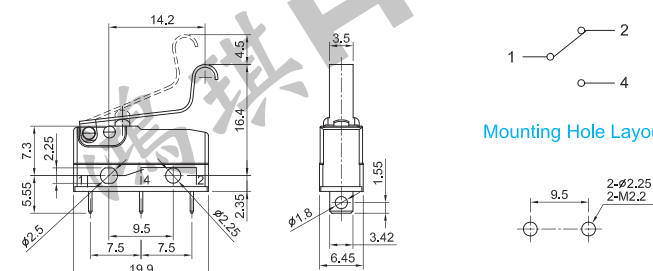


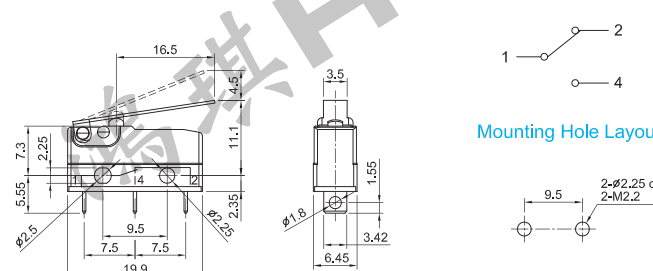


MICRO SWITCHES

| | |
|--|--|
| <p>TMS1-E001</p> <ul style="list-style-type: none"> Rating: AC125V 16A AC125/250V 16GPA AC125/250V 16(4)A DC30V 10A 1/2hp AC125/250V Force: 400gf Life: 50,000 Cycles  <p>Circuit</p>  <p>Mounting Hole Layout</p>  | <p>TMS1-E002</p> <ul style="list-style-type: none"> Rating: AC125V 0.1A AC125/250V 0.1GPA AC125/250V 0.1(0.05)A Force: 75gf Life: 50,000 Cycles  <p>Circuit</p>  <p>Mounting Hole Layout</p>  |
| <p>TMS1-F001P</p> <ul style="list-style-type: none"> Rating: AC125V 5A AC250V 5(2)A 1/10hp AC250V Force: 100gf Life: 50,000 Cycles  <p>Circuit</p>  <p>Mounting Hole Layout</p>  | <p>TMS1-F002S</p> <ul style="list-style-type: none"> Rating: AC125V 5A AC250V 5(2)A 1/10hp AC250V Force: 100gf Life: 50,000 Cycles  <p>Circuit</p>  <p>Mounting Hole Layout</p>  |
| <p>SEALED TYPE : IP60 TMS1-F003S</p> <ul style="list-style-type: none"> Rating: AC125V 5A AC250V 5(2)A 1/10hp AC250V Force: 150gf Life: 50,000 Cycles  <p>Circuit</p>  <p>Mounting Hole Layout</p>  | <p>TMS1-G001</p> <ul style="list-style-type: none"> Rating: DC12V 3A Force: 450gf Max. Life: 30,000 Cycles  <p>Circuit</p>  <p>Mounting Hole Layout</p>  |
| <p>TMS1-H001S</p> <ul style="list-style-type: none"> Rating: AC125/250V 10.1AGP 1/4hp AC125V (UL) AC250V 10(4)A (EN) 1E4 40T125 Force: 150gf Max. Life: 50,000 Cycles  <p>Circuit</p>  <p>Mounting Hole Layout</p>  | <p>TMS1-H002S</p> <ul style="list-style-type: none"> Rating: AC125/250V 10.1AGP 1/4hp AC125V (UL) AC250V 10(4)A (EN) 1E4 40T125 Force: 150gf Max. Life: 50,000 Cycles  <p>Circuit</p>  <p>Mounting Hole Layout</p>  |