



P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

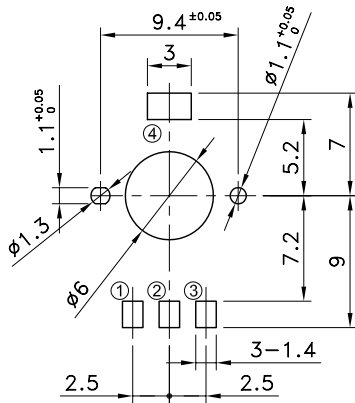


SOLDERING CONDITIONS



SPECIFICATIONS

- |                                 |                        |
|---------------------------------|------------------------|
| 1. Rated Power                  | : DC 5V 0.05W          |
| 2. Total Resistance             | : 10KΩ±30%             |
| 3. Insulation Resistance        | : 50MΩ Min. at DC 100V |
| 4. Resistance Taper             | : B Linear             |
| 5. Rotational Noise             | : 100mV Max.           |
| 6. Dielectric Strength          | : AC 100V for 1 Minute |
| 7. Total Rotational Angle       | : 360°                 |
| 8. Rotational Torque            | : 30 gf · cm           |
| 9. Life                         | : 100,000 Cycles       |
| 10. Package                     | : 1,500 Pcs/Reel       |
| 11. Operating Temperature Range | : -40~+85°C            |
| 12. Storage Temperature Range   | : -40~+85°C            |

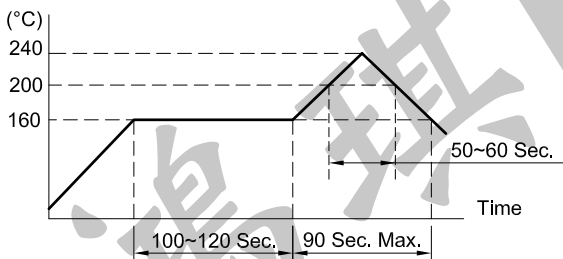

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED : ±0.3		CODE NO.:HCH-1169	
ISSUED		CONFIRMED		<b>HCH</b> ISO9001 Certified ISO14001 Certified <b>HORNG CHIH</b> 鴻琪股份有限公司		PART NO.	
<i>John</i> 2006.12.08		<i>Joey</i> 2006.12.08				<b>EVR11K-01</b>	