

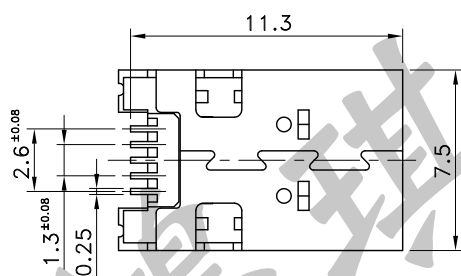


3	Plastic	LCP		UL94-0, Black
2	Shell	Stainless Steel	Ni: 50u" Min.	
1	Terminals	Copper Alloy	Ni: 30u" Min., Gold flash on contact and solder area	
No.	Parts	Material	Finish	Remarks

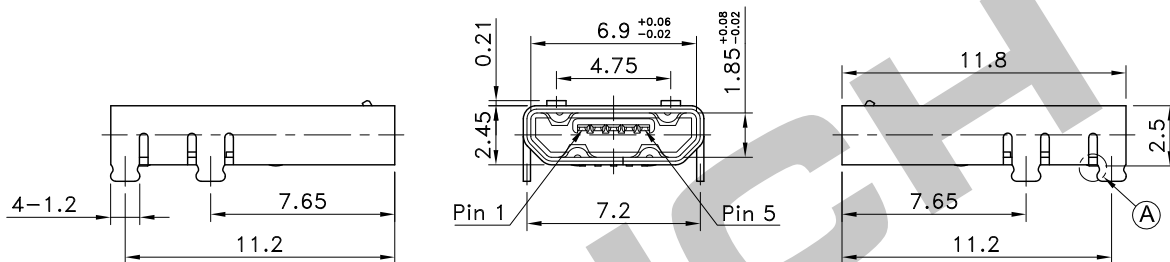


DETAIL A

P.C.B TERMINAL POSITION


SPECIFICATIONS

1. Rating : AC 30V 1.8A Max. (Pin 1 , 5)
AC 30V 0.5A Max. (Pin 2 , 3 , 4)
2. Contact Resistance : 30mΩ Max.
3. Insulation Resistance : 100MΩ Min.
4. Dielectric Strength : AC 250V for 1 Minute
5. Insertion Force : 3.5kgf Max.
6. Extract Force : 0.8kgf Min.
7. Life : 10,000 Cycles
8. Operating Temperature Range : -25~+85°C

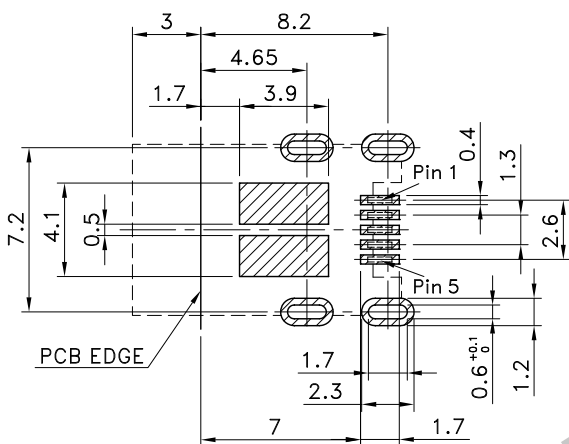

Tolerance:±0.05
(Top View)

SOLDERING CONDITIONS

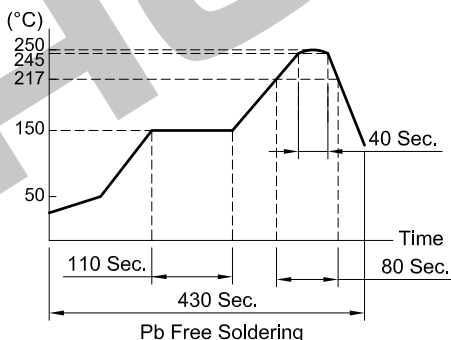

REVISION:

DATE:

REVISION:

DATE:

UNIT:mm

THIRD ANGLE PROJECTION METHOD

TOL. UNLESS OTHERWISE STATED:±0.2

CODE NO.: HCH-2052

ISSUED

CONFIRMED

PART NO.

John

Elvis

HCH
ISO9001 Certified
ISO14001 Certified

HORNG CHIH
鴻琪股份有限公司

MUSB-840CB

2016.02.03

2016.02.03