

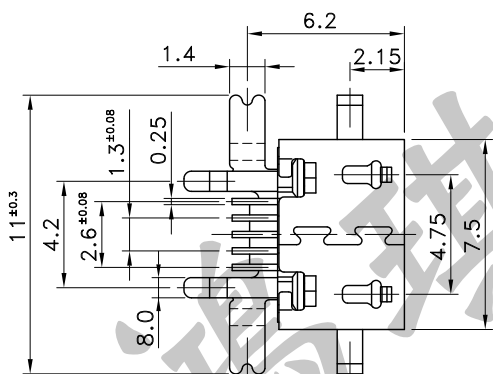
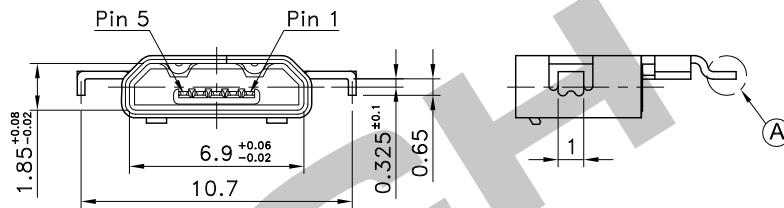


3	Plastic	LCP		UL94-0, Black
2	Shell	Stainless Steel	Ni: 50u" Min.	
1	Terminals	Copper Alloy	Ni: 30u" Min., Gold flash on contact and solder area	
No.	Parts	Material	Finish	Remarks




DETAIL A

P.C.B TERMINAL POSITION


SPECIFICATIONS

1. Rating : AC 30V 1.8A Max. (Pin 1 , 5)
AC 30V 0.5A Max. (Pin 2 , 3 , 4)
2. Contact Resistance : 30mΩ Max.
3. Insulation Resistance : 100MΩ Min.
4. Dielectric Strength : AC 250V for 1 Minute
5. Insertion Force : 3.5kgf Max.
6. Extract Force : 0.8kgf Min.
7. Life : 10,000 Cycles
8. Operating Temperature Range : -25~+85°C

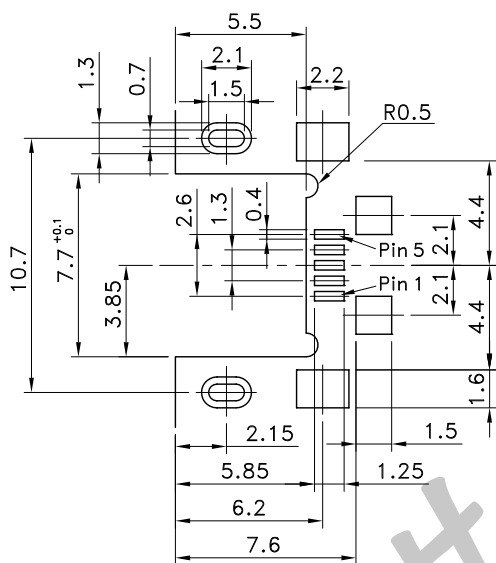

Tolerance:±0.05
(Top View)

SOLDERING CONDITIONS

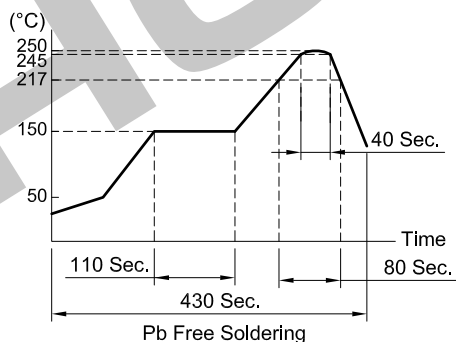

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.: HCH-2053	
ISSUED		CONFIRMED		HCH ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司		PART NO.	
<i>John</i> 2016.02.05		<i>Elvis</i> 2016.02.05				MUSB-841CB	