

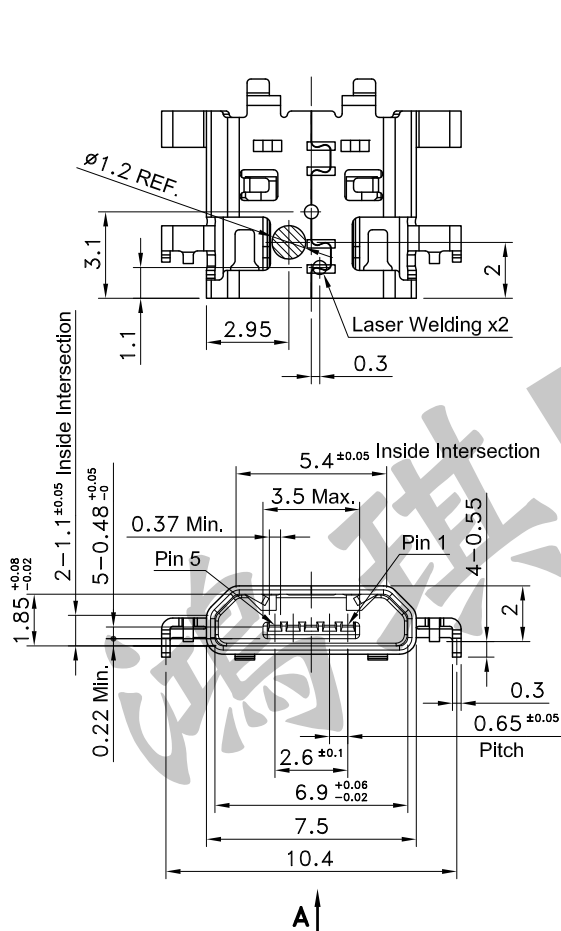


3	Contact	Copper Alloy	5	Contact Area: Au 2u" Over Pd/Ni 5u" Min. Solder Tail: Au 2u" Over Ni 50u" Min.	
2	Shell	Stainless Steel	1	Matte Tin 100~200u" Plating Overall Ni 50u" Min. Under Plating Overall	
1	Housing	Terminal Plastic	1		UL94V-0, Black
No.	Parts	Material	Q'ty	Finish	Remarks

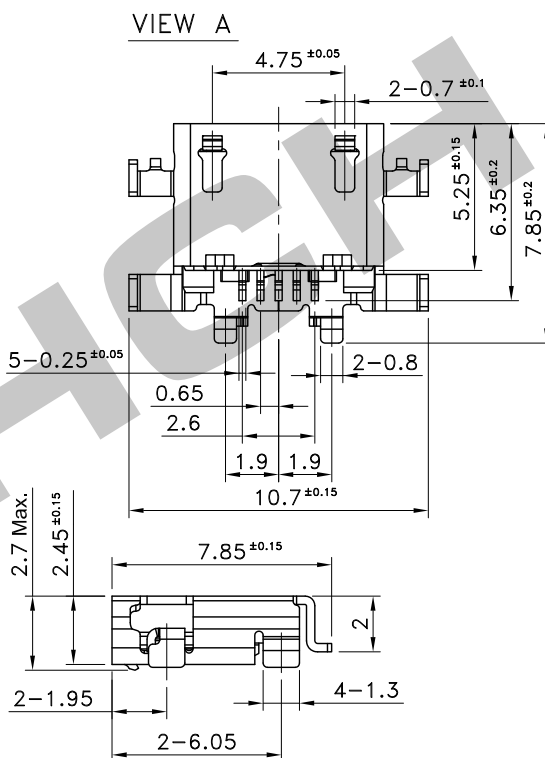


P.C.B TERMINAL POSITION

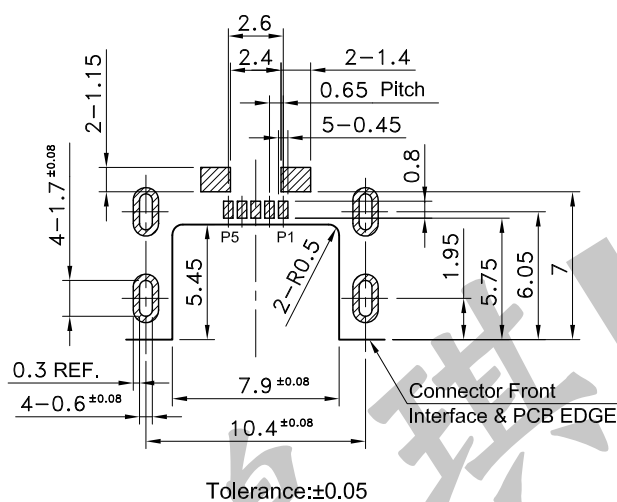

SPECIFICATIONS

- Rating : AC/DC 5V
1A (Pin 2,3,4)
1.8A (Pin 1,5)
- Contact Resistance : 30mΩ Max.
- Insulation Resistance : 100MΩ Min.
- Dielectric Strength : AC 100V for 1 Minute
- Insertion Force : 3.57 kgf Max.
- Extract Force : 0.82 kgf Min.
- Life : 10,000 Cycles
- Operating Temperature Range : -30~+85°C
- Storage Temperature Range : -40~+85°C

SOLDERING CONDITIONS

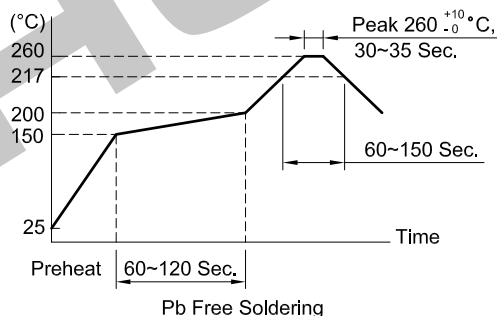

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.2	CODE NO.: HCH-2320
ISSUED	CONFIRMED	PART NO.	
<i>John</i>	<i>Elvis</i>	MUSB-849CB	
2020.02.04	2020.02.04	HCH ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司	