


6	Contact	Copper Alloy	Nickel Plated on All Area, Gold Flash on Contact & Solder Area	
5	Shell	Brass	Nickel Plated	
4	Cover Shell	Stainless Steel	Nickel Plated	
3	Inner Ground Cover Shell	Stainless Steel		
2	Mid Plate	Stainless Steel	Nickel Plated	
1	Insulator	PA10T		Black
No.	Parts	Material	Finish	Remarks


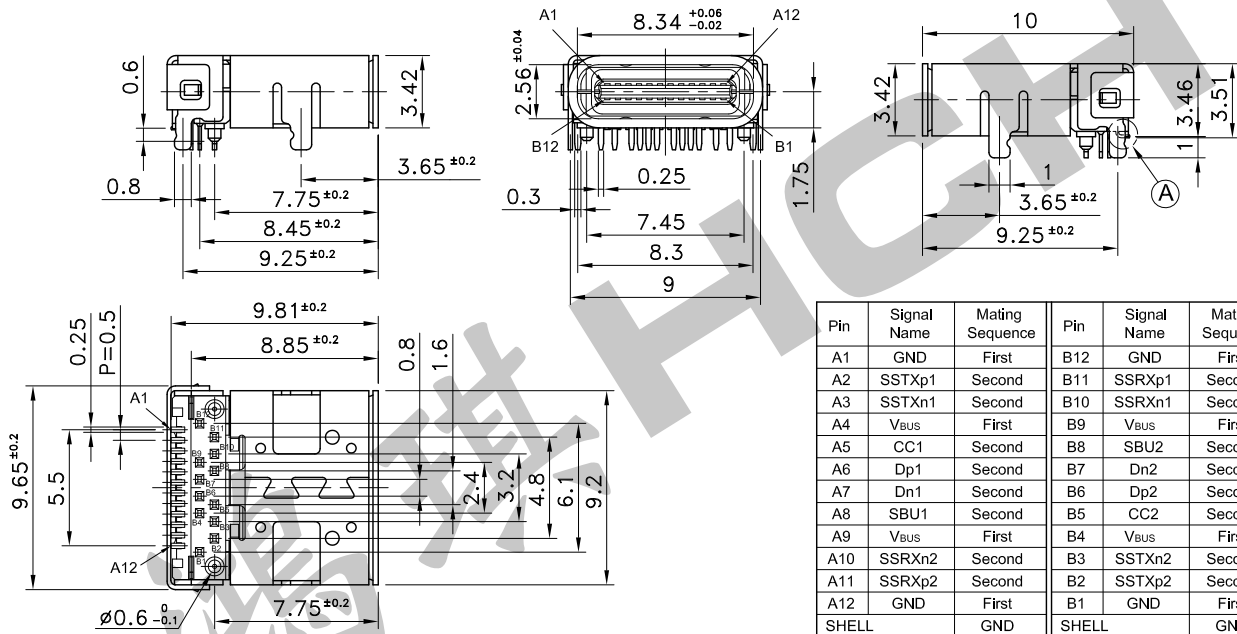


Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	SSTXp1	Second	B11	SSRXp1	Second
A3	SSTXn1	Second	B10	SSRXn1	Second
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A10	SSRXn2	Second	B3	SSTXn2	Second
A11	SSRXp2	Second	B2	SSTXp2	Second
A12	GND	First	B1	GND	First
SHELL	GND		SHELL	GND	

SPECIFICATIONS

- Contact Resistance : 40mΩ Max.
- Insulation Resistance : 100MΩ Min.
- Insertion Force : 0.5~2 kgf
- Extract Force : 0.8~2 kgf
- Life : 10,000 Cycles
- Operating Temperature Range : -25~+85°C

SOLDERING CONDITIONS

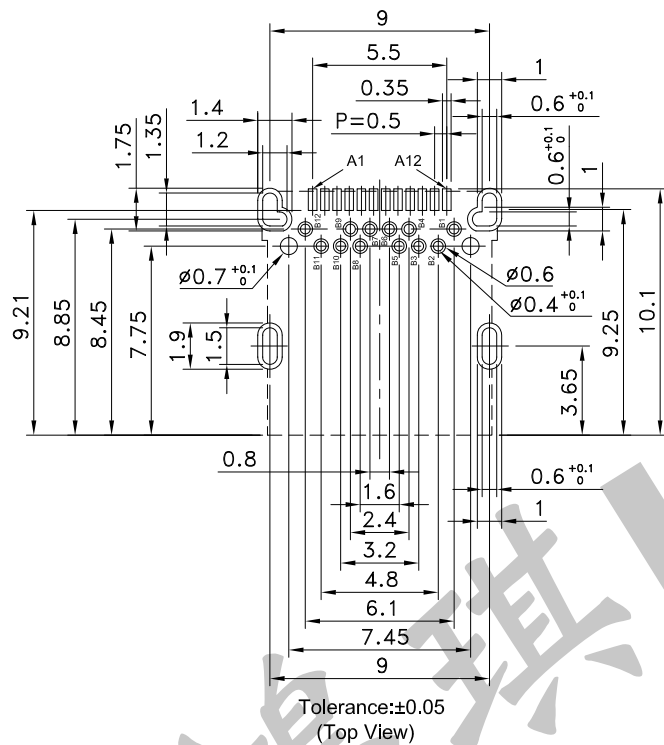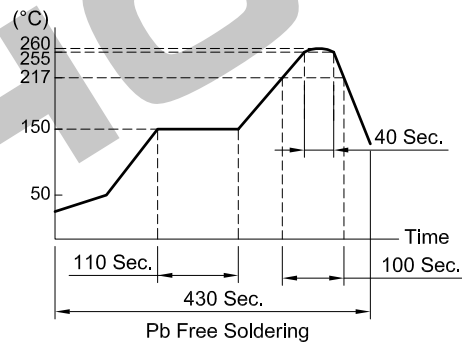

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.2	CODE NO.: HCH-2226-1
ISSUED	CONFIRMED	PART NO.	
<i>John</i>	<i>Elvis</i>	MUSB-861BB	
2020.01.14	2020.01.14	HORNG CHIH 鴻琪股份有限公司	