No.	Parts	Material	Q'ty	Finish	Remark
4	Housing	PA9T	1		
3	Stopper	C5210R t:0.2	1	Gold Plating	
2	Center Pin	Brass ø0.65	1	Gold Plating	
1	Shell	C5210R t:0.25	1	Gold Plating	Black , UL94V-0

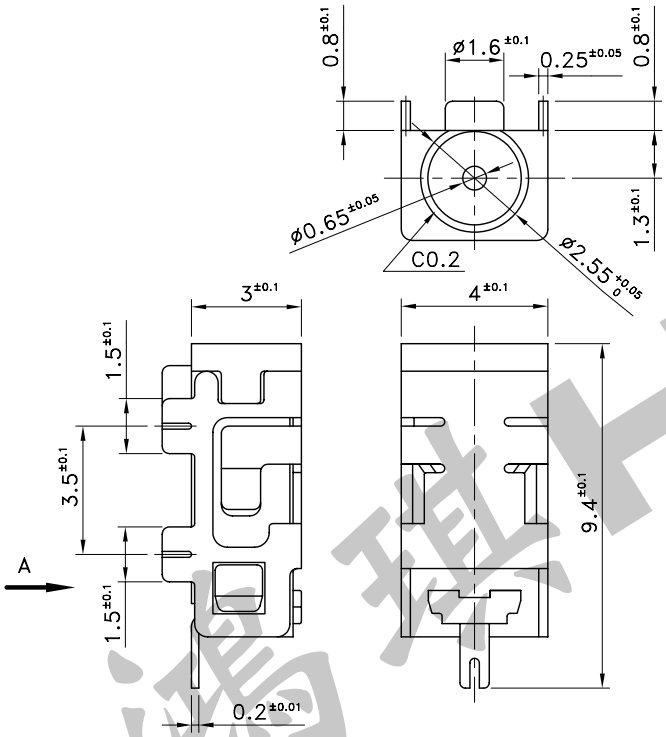

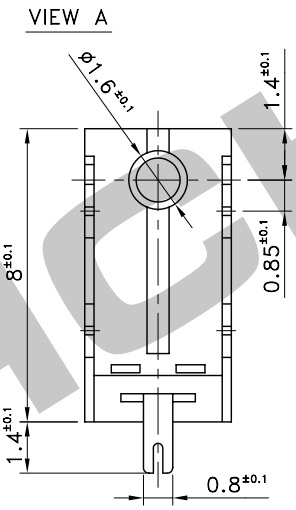

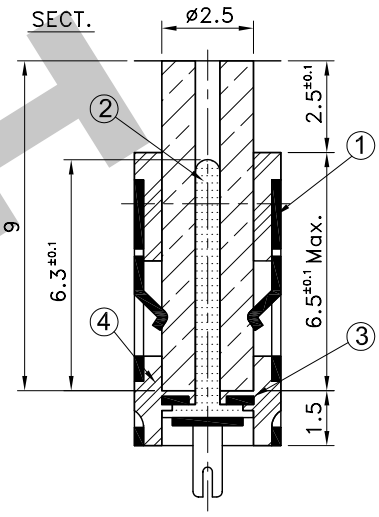

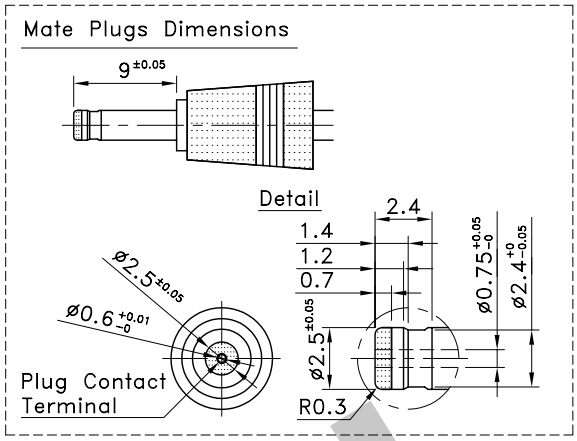

P.C.B TERMINAL POSITION

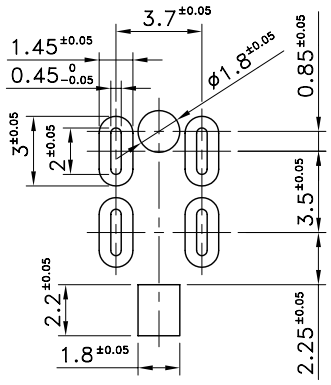

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

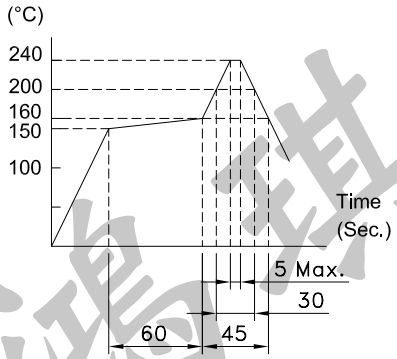

SPECIFICATIONS

1. Rating : DC 5V 2A
2. Contact Resistance : 30mΩ Max.
3. Insulation Resistance : 1GΩ Min. at DC 500V
4. Dielectric Strength : AC 500V for 1 Minute
5. Operating Force : 0.3~2kgf
6. Life : 10,000 Cycles
7. Package : 1,000 Pcs/Reel
8. Operating Temperature Range : -30~+80°C
8. Storage Temperature Range : -45~+85°C

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.: HCH-1021

ISSUED	CONFIRMED		PART NO.
John	Joey	HCH® ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司	PJK-113
2005.11.22	2005.11.22		

鴻琪 HCH