

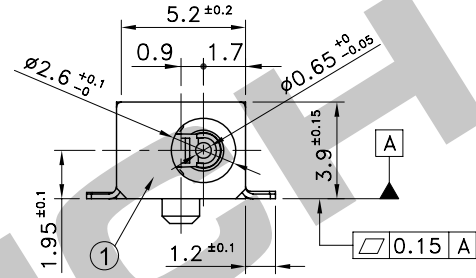
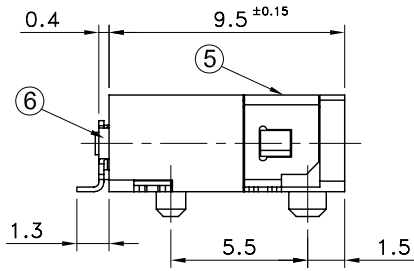



6	Stopper	Copper Alloy	1	Ag	
5	Shield	Copper Alloy	1	Ag	
4	Center Pin	Copper Alloy	1	Ag	
3	Shunt Terminal	Copper Alloy	1	Ag	
2	Spring Contact	Copper Alloy	1	Ag	
1	Housing	High-Temp Plastic	1		Black
No.	Parts	Material	Q'ty	Finish	Remark

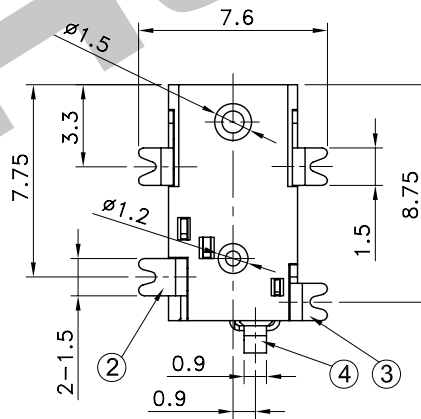


P.C.B TERMINAL POSITION

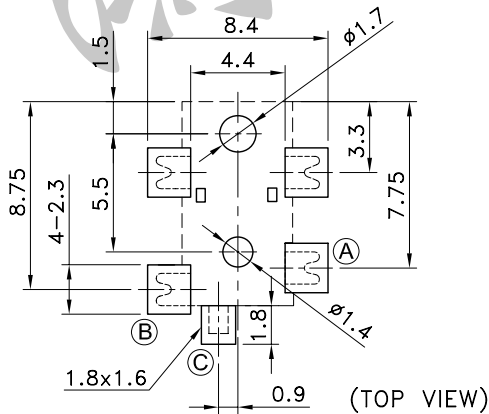

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

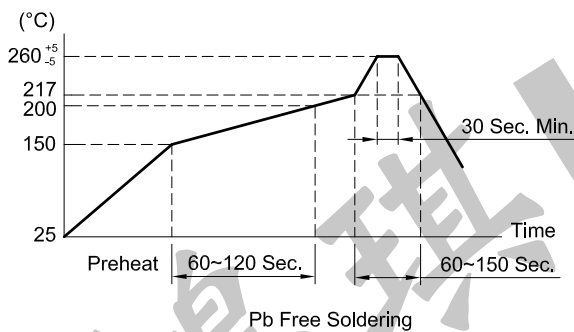

SPECIFICATIONS

- Rating : DC 10V 2A
- Contact Resistance : Plug To Contacts
50mΩ Max.
Contact To Shunt
30mΩ Max.
- Insulation Resistance : 100MΩ Min.
- Dielectric Strength : AC 250V for 1 Minute
- Insertion & Extraction Force : 0.3~2 kgf
- Life : 5,000 Cycles
- Package : 1,000 Pcs/Reel
- Operating Temperature Range : -25~+70°C

REVISION: _____ DATE: _____ REVISION: _____ DATE: _____

UNIT:mm THIRD ANGLE PROJECTION METHOD TOL. UNLESS OTHERWISE STATED:±0.3 CODE NO.:HCH-1629

ISSUED	CONFIRMED	HCH ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司	PART NO.
John	Elvis		PJK-120
2010.04.09	2010.04.09		