

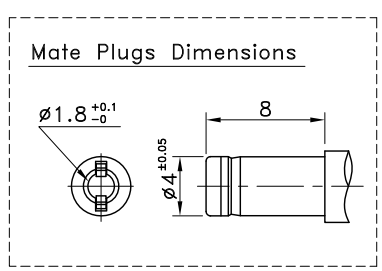
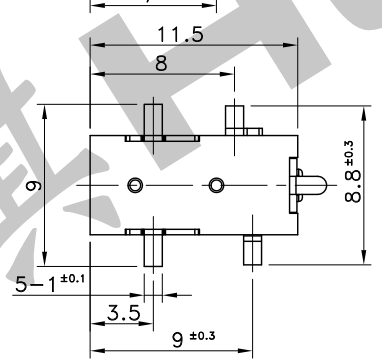


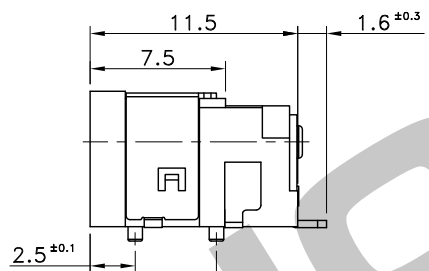



7	Shell	t=0.3 Copper Alloy	1	Ag Plated	
6	Pin	t=0.4 Copper Alloy	1	Ag Plated	
5	Shunt	t=0.4 Copper Alloy	1	Ag Plated	
4	Spring	t=0.3 Copper Alloy	1	Ag Plated	
3	Center Pin	Copper Alloy	1	Ag Plated	
2	Cover	High Temp Plastic	1		UL94V-0, Black
1	Housing	High Temp Plastic	1		UL94V-0, Black
No.	Parts	Material	Q'ty	Finish	Remarks



**P.C.B TERMINAL POSITION**


**CIRCUIT ARRANGEMENT**

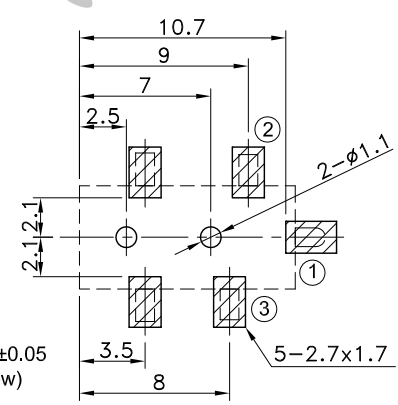

Tolerance: ±0.05  
(Top View)

**SOLDERING CONDITIONS**

**SPECIFICATIONS**

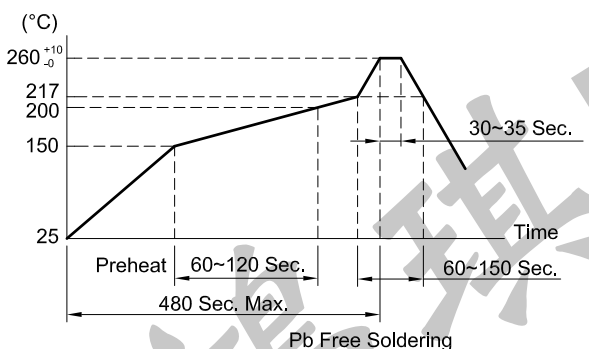

1. Rating : DC 16V 3.5A
2. Contact Resistance : 50mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 500V
4. Dielectric Strength : AC 500V for 1 Minute
5. Insertion & Extraction Force : 0.3~3kgf
6. Life : 5,000 Cycles
7. Package : 500 Pcs/Reel
8. Operating Temperature Range : -25~+85°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-1585-2	
ISSUED		CONFIRMED		<b>HORNG CHIH</b> HCH® ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司		PART NO.  <b>PJK-122A</b>	
<i>John</i> 2023.02.16	<i>Elvis</i> 2023.02.16						