



8	Terminal 7	t:0.2 Copper Alloy	1	Gold Flash	
7	Terminal 6	t:0.2 Copper Alloy	1	Gold Flash	
6	Terminal 5	t:0.2 Copper Alloy	1	Gold Flash	
5	Terminal 4	t:0.25 Copper Alloy	1	Gold Flash	
4	Terminal 3	t:0.25 Copper Alloy	1	Gold Flash	
3	Terminal 2	t:0.25 Copper Alloy	1	Gold Flash	
2	Terminal 1	t:0.25 Copper Alloy	1	Gold Flash	
1	Housing	PA10T	1		UL94V-0, Black
No.	Parts	Material	Q'ty	Finish	Remarks

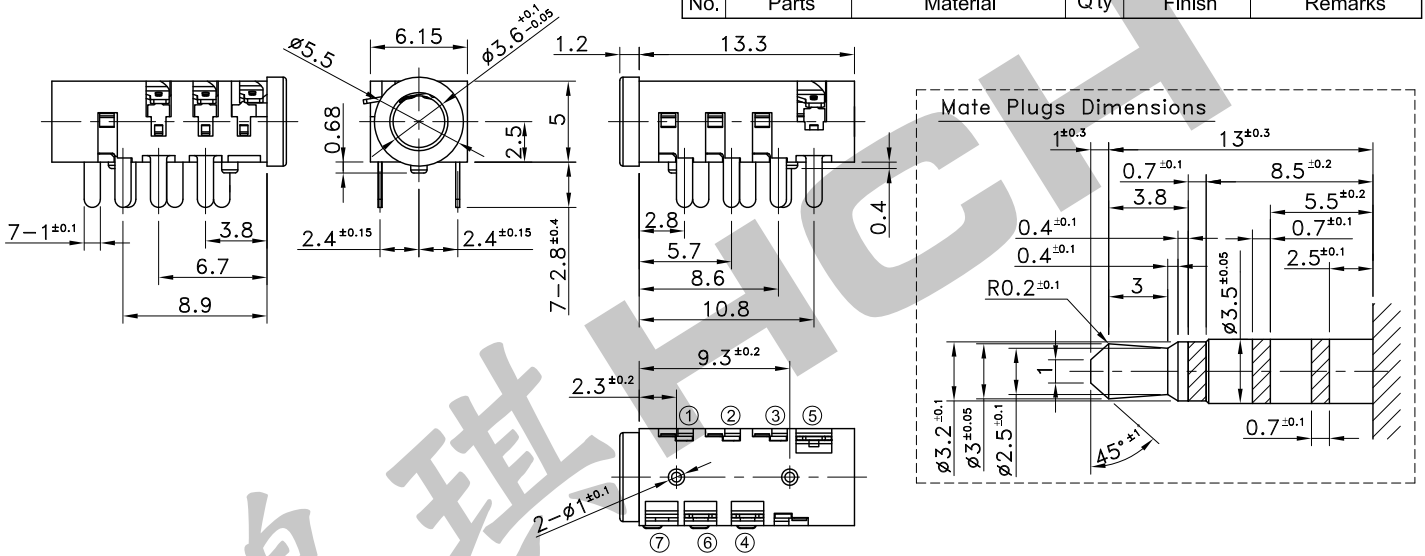

P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

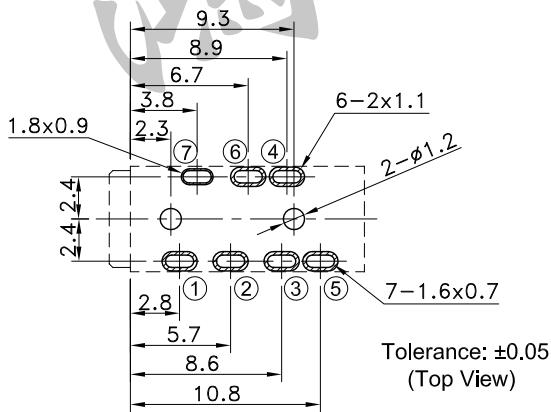

SOLDERING CONDITIONS

Part No.	Circuit Diagram	Terminal Arrangement Figure
PJK-443B		
PJK-451B		
PJK-452B		
PJK-453B		
PJK-454B		

SPECIFICATIONS

- Rating : DC 30V 0.5A
- Contact Resistance : 50mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 500V
- Dielectric Strength : AC 500V for 1 Minute
- Insertion & Extraction Force : 0.3~3kgf
- Life : 5,000 Cycles
- Package : 1,000 Pcs/Bag
- Operating Temperature Range : -25~+85°C

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-2498-2
ISSUED	CONFIRMED	PART NO.	
<i>John</i>	<i>Elvis</i>	PJK-443B	PJK-451B
2023.03.13	2023.03.13	PJK-452B	PJK-453B
HORNG CHIH 鴻琪股份有限公司 ISO9001 Certified ISO14001 Certified		PJK-454B	