

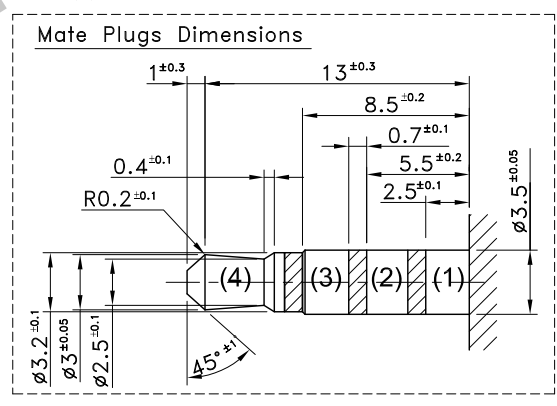

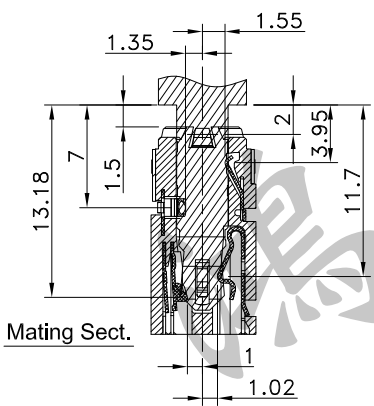

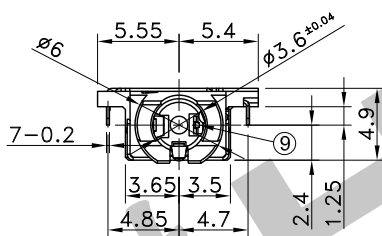




10	Dummy Pin	Stainless Steel t0.15			
9	Separator	High Temp Plastic			UL94V-0, Black
8	Contact (1)	Copper Alloy t0.2		Gold 2u" Min. over All, Ni 50~180u" Under Plated	
7	Shunt (6)	Copper Alloy t0.2	1		
6	Contact (5)	Copper Alloy t0.2	1		
5	Contact (4)	Copper Alloy t0.2	1		
4	Contact (3)	Copper Alloy t0.2	1		
3	Contact (2)	Copper Alloy t0.2	1		
2	Shell	Copper Alloy t0.2	1	Ni 60u" Min. Plated	
1	Housing	High Temp Plastic	1		UL94V-0, Black
No.	Parts	Material	Q'ty	Finish	Remarks




**P.C.B TERMINAL POSITION**

**CIRCUIT ARRANGEMENT**

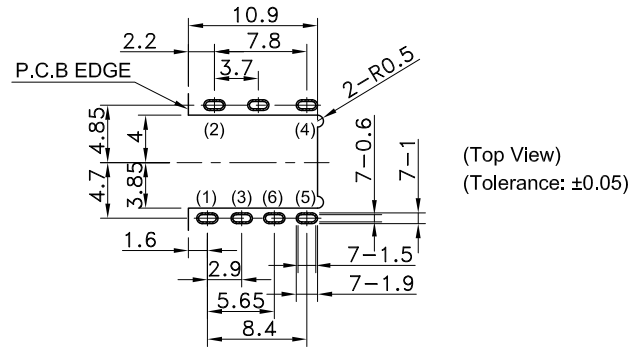

**SOLDERING CONDITIONS**

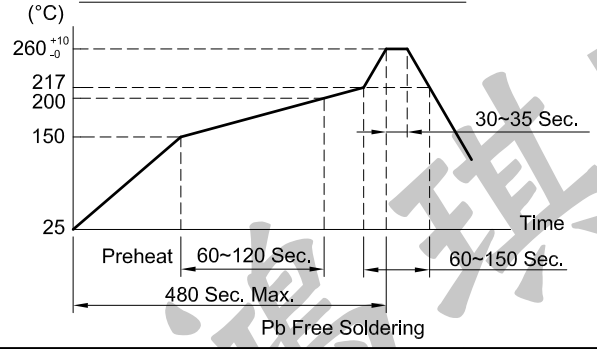

**SPECIFICATIONS**

- Rating : DC 12V 1A Max.
- Contact Resistance : 50mΩ Max. (initial)  
100mΩ Max. (Final)
- Insulation Resistance : 100MΩ Min. at DC 500V
- Dielectric Strength : AC 500V for 1 Minute
- Insertion & Extraction Force : 0.4~3kgf (initial)  
0.3~3kgf (Final) life test
- Life : 5,000 Cycles
- Package : 750 Pcs/Reel
- Operating Temperature Range : -25~+70°C

REVISION:	DATE:	REVISION:	DATE:
-----------	-------	-----------	-------

UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-2623
---------	-------------------------------	-----------------------------------	-------------------

ISSUED	CONFIRMED	<b>HORNG CHIH</b> 鴻琪股份有限公司 ISO9001 Certified ISO14001 Certified	PART NO.
 2026.04.16	 2026.04.16		<b>PJK-466</b>