



7	Body	PA	1	Black UL94HB
6	Terminal B	t0.25 C5210R(PBSR)	1	Ag Plating
5	Movable Terminal T	t0.35 C5210R(PBSR)	1	Ag Plating
4	Movable Terminal R	t0.25 C5210R(PBSR)	1	Ag Plating
3	Terminal A	t0.25 C5210R(PBSR)	1	Ag Plating
2	Cover Terminal	t0.25 C2680R(BSR)	1	Ag Plating
1	Side Terminal	t0.3 C5210R(PBSR)	1	Ag Plating
No.	Parts	Material	Q'ty	Finish



### CIRCUIT ARRANGEMENT

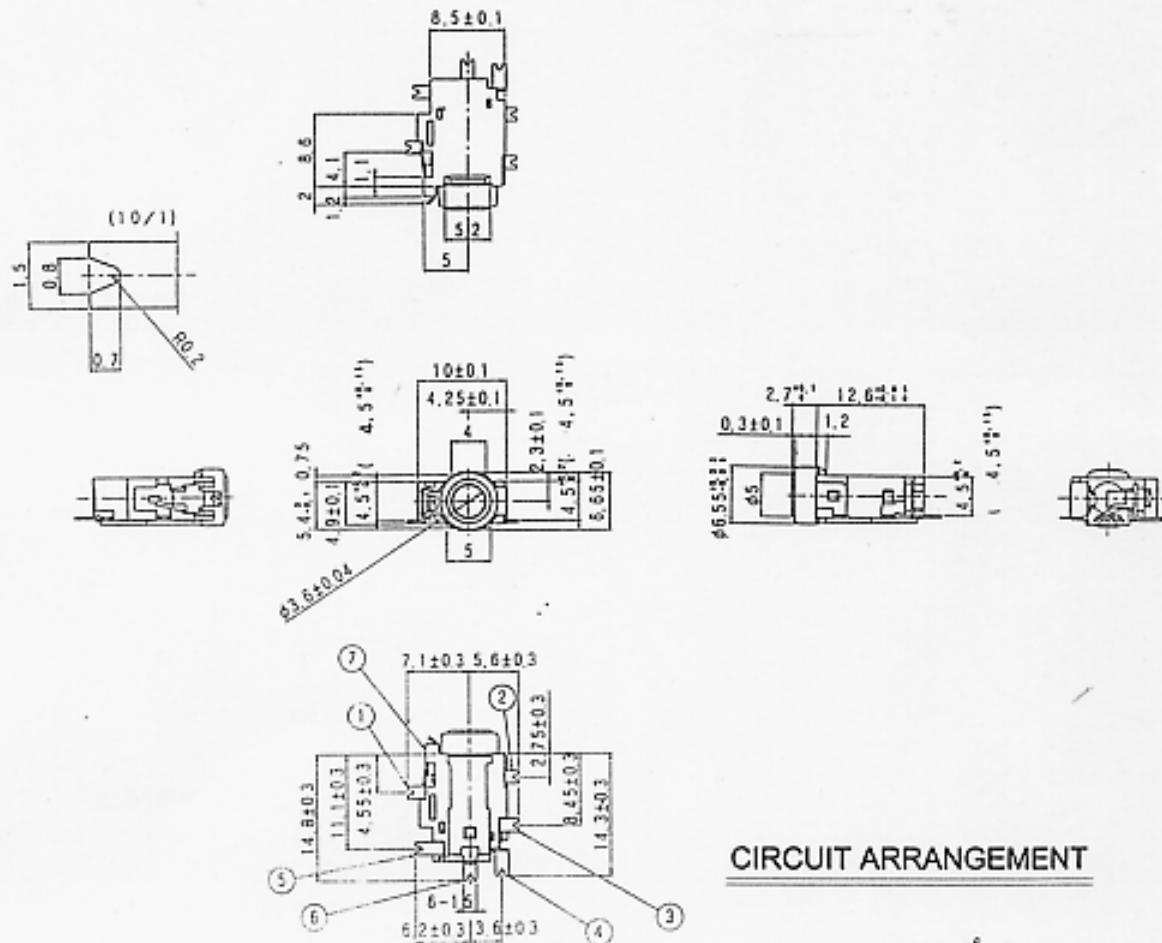

### P.C.B TERMINAL POSITION



### SPECIFICATIONS

- |                                 |  |
|---------------------------------|--|
| 1. Rating                       | : DC 12V 1A                            |
| 2. Contact Resistance           | : 30mΩ Max.                            |
| 3. Insulation Resistance        | : 100MΩ Min.                           |
| 4. Dielectric Strength          | : AC 500V for 1 Minute                 |
| 5. Insertion & Extraction Force | : 0.5~3.0kgf                           |
| 6. Terminal Strength            | : 500 gf                               |
| 7. Life                         | : 5,000 Cycles                         |
| 8. Soldering Conditions         | : Hand Solder: 350±10°C for 3±0.5 sec. |

REVISION:		DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-000	
ISSUED	CONFIRMED	PART NO.		<b>PJK-612</b>
<i>Elvis</i>	<i>Joey</i>	<b>HCH</b> HORNG CHIH <small>ISO9001 Certified ISO14001 Certified</small> 鴻琪股份有限公司		
2003.07.18	2003.07.18			