


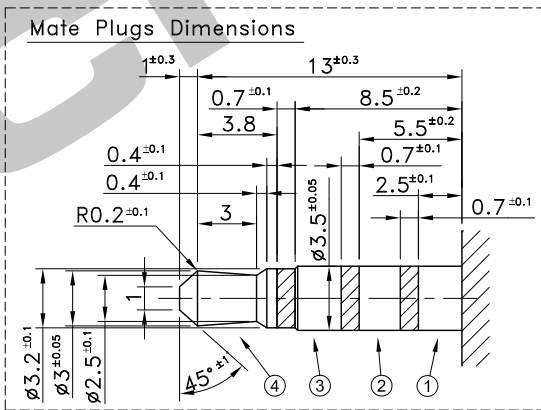
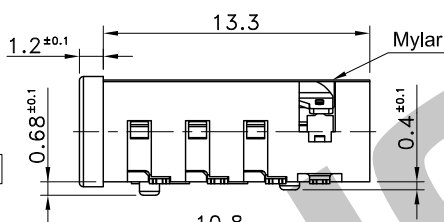


9	Mylar	Polyimide		
8	Terminal 7	t0.2 Phosphor Bronze	Au Plating	
7	Terminal 6	t0.2 Phosphor Bronze	Au Plating	
6	Terminal 5	t0.2 Phosphor Bronze	Au Plating	
5	Terminal 4	t0.25 Phosphor Bronze	Au Plating	
4	Terminal 3	t0.25 Phosphor Bronze	Au Plating	
3	Terminal 2	t0.25 Phosphor Bronze	Au Plating	
2	Terminal 1	t0.25 Phosphor Bronze	Au Plating	
1	Housing	PA10T		UL94V-0, Black
No.	Parts	Material	Finish	Remarks

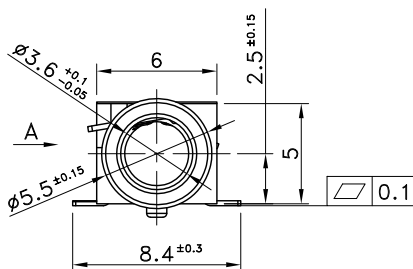


VIEW A

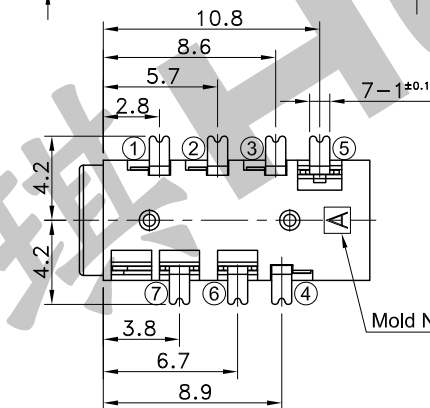


CIRCUIT ARRANGEMENT

P.C.B TERMINAL POSITION

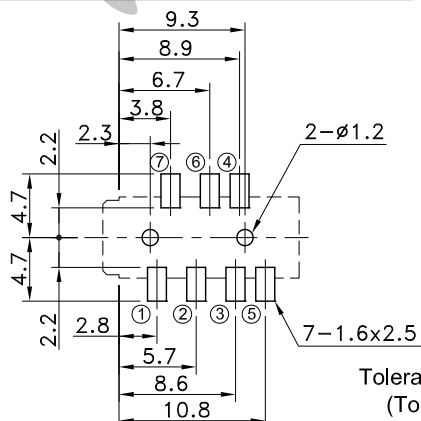

SOLDERING CONDITIONS

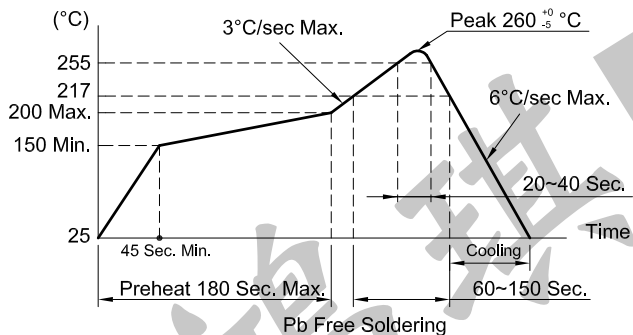

Part No.	Circuit Diagram	Terminal Arrangement Figure
PJK-633MB		
PJK-634MB		

SPECIFICATIONS

- Rating : DC 30V 0.5A
- Contact Resistance : 50mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 500V
- Dielectric Strength : AC 500V for 1 Minute
- Insertion & Extraction Force : 0.3~3kgf
- Life : 5,000 Cycles
- Taping Package : 700 Pcs/Reel
- Operating Temperature Range : -25~+85°C

REVISION: _____ DATE: _____ REVISION: _____ DATE: _____

UNIT:mm THIRD ANGLE PROJECTION METHOD TOL. UNLESS OTHERWISE STATED:±0.3 CODE NO.:HCH-2493-1 (S)

ISSUED	CONFIRMED	HORNG CHIH 鴻琪股份有限公司	PART NO.
 2023.04.11	 2023.04.11		PJK-633MB PJK-634MB