No.	Parts	Material	Finish
5	Terminal 4	Copper Alloy	Silver Plated
4	Terminal 3	Copper Alloy	Silver Plated
3	Terminal 2	Copper Alloy	Silver Plated
2	Terminal 1	Copper Alloy	Silver Plated
1	Body	PA	



DETAIL A

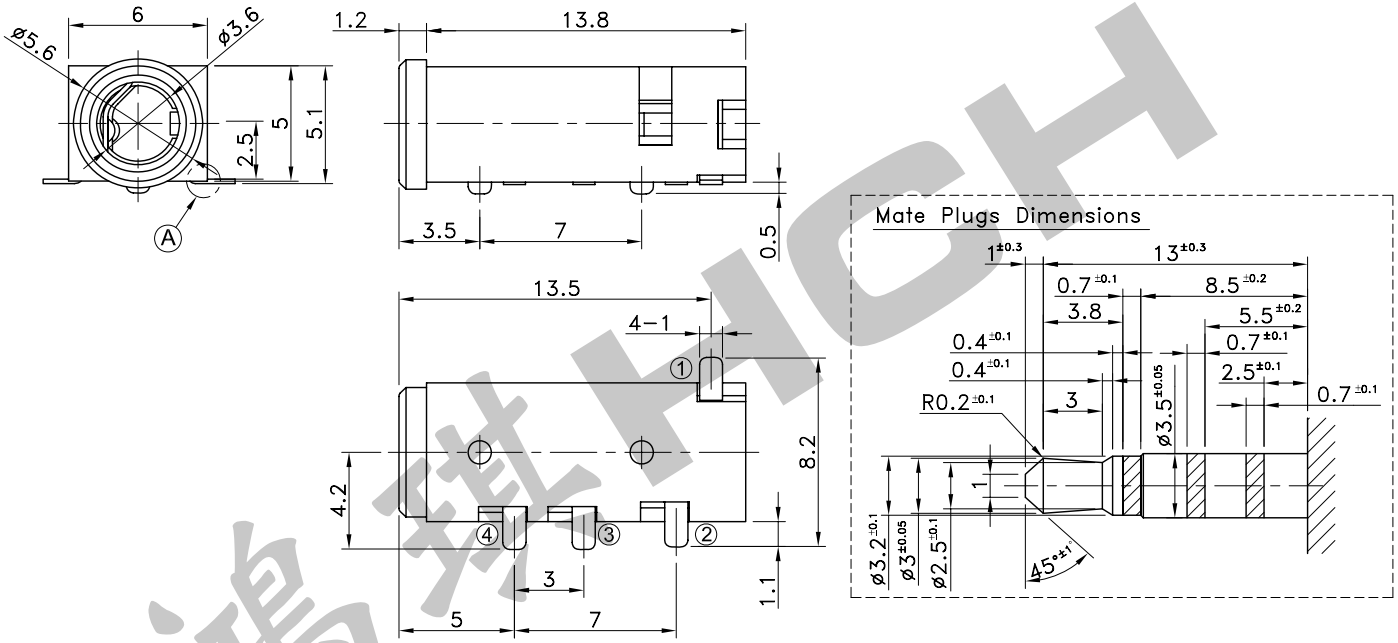

P.C.B TERMINAL POSITION

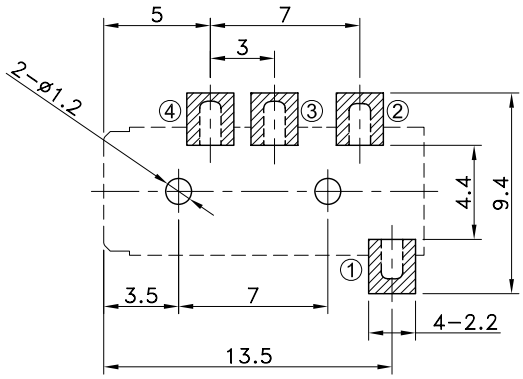

CIRCUIT ARRANGEMENT

Part No.	Circuit Diagram	Terminal Arrangement Figure
PJK-674		
PJK-675		
PJK-676		

SOLDERING CONDITIONS

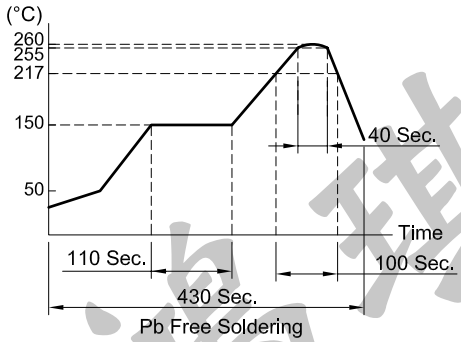

SPECIFICATIONS

1. Rating : DC 12V 1A Max.
2. Contact Resistance : 50mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 500V
4. Dielectric Strength : AC 500V for 1 Minute
5. Insertion & Extraction Force : 0.3~3kgf
6. Life : 5,000 Cycles
7. Taping Package : 1,000 Pcs/Reel
8. Operating Temperature Range : -25~+85°C
9. Reflow Soldering Profile : According Reflow Profile 2 Times

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.2	CODE NO.:HCH-1622

ISSUED	CONFIRMED		PART NO.
John 2010.03.25	Elvis 2010.03.25	HCH® ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司	PJK-674 PJK-675 PJK-676

鴻琪 HCH