No.	Parts	Material	Finish
7	Terminal 5	Brass	Gold Flash
6	Terminal 4	Brass	Gold Flash
5	Terminal 3	Copper Alloy	Gold Flash
4	Terminal 2	Copper Alloy	Gold Flash
3	Terminal 1	Copper Alloy	Gold Flash
2	Housing	PA10T	
1	Cover	PA10T	

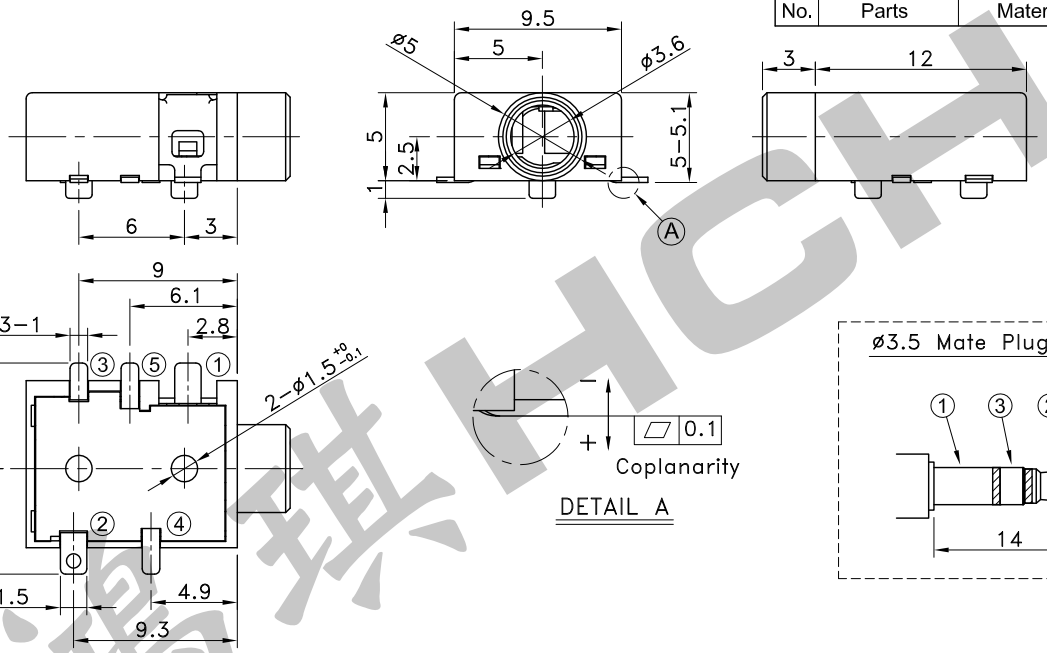

P.C.B TERMINAL POSITION

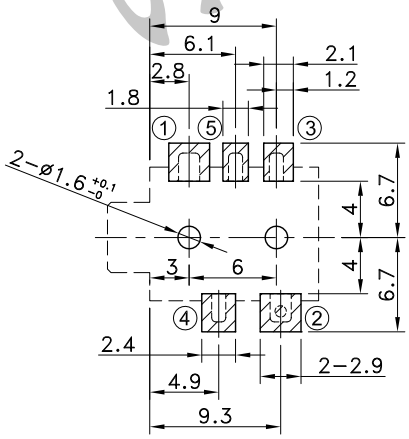

Tolerance:±0.05
(Top View)

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

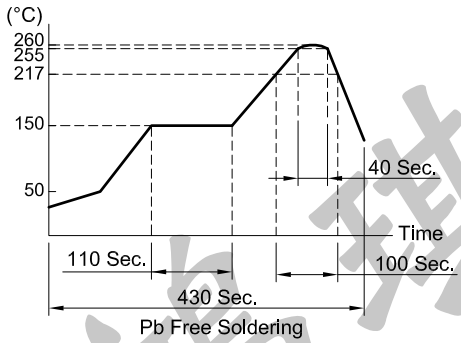

SPECIFICATIONS

1. Rating : DC 12V 1A Max.
2. Contact Resistance : 50mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 500V
4. Dielectric Strength : AC 500V for 1 Minute
5. Insertion & Extraction Force : 0.3~3kgf
6. Life : 5,000 Cycles
7. Operating Temperature Range : -25~+85°C

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.2	CODE NO.:HCH-2230

ISSUED	CONFIRMED		PART NO.
John 2018.12.11	Elvis 2018.12.11	HCH® ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司	PJK-702

鴻琪 HCH