


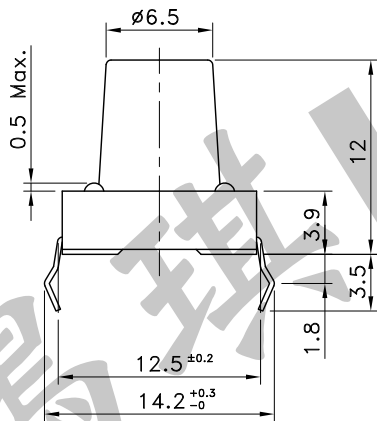



5	Contact	C5210R-EH	1	Ag 0.5u
4	Terminal	C2680R-EH	1	Ag 0.5u
3	Cover	SPTE	1	Sn
2	Stem	Nylon 66	1	
1	Case	Nylon 66	1	
No.	Parts	Material	Q'ty	Remark



P.C.B TERMINAL POSITION

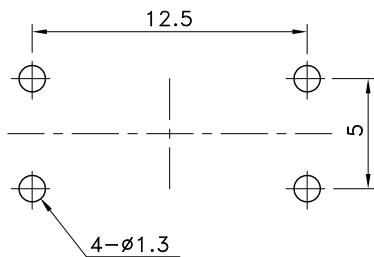

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Auto Soldering	280 Max.	3 Max.
Manual Soldering	350±10	3 Max.

SPECIFICATIONS

- Rating : DC 12V 50 mA Max.
- Contact Resistance : 100mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC250V for 1 Minute
- Operating Force : 160±50gf
- Stroke : 0.3±0.1mm
- Life : 50,000 Cycles
- Operating Temperature Range : -20~+70°C
- Storage Temperature Range : -30~+80°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.: HCH-386-3 (Y)	
ISSUED		CONFIRMED		HCH ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司		PART NO.	
<i>John</i> 2015.11.26		<i>Elvis</i> 2015.11.26				PTS-049-H1	