

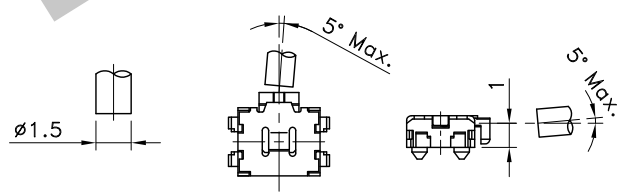
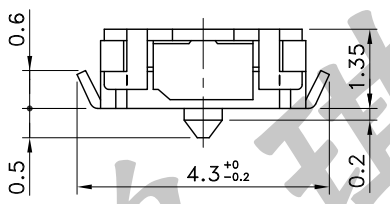


Recommend use cap shape dimension




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

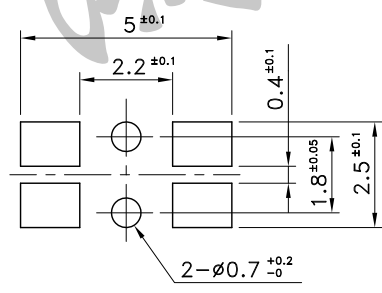

SOLDERING CONDITIONS

SPECIFICATIONS

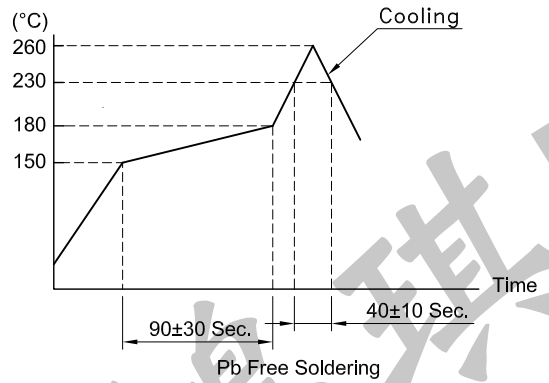

- 1. Rating : DC 12V 50mA Max.
DC 2V 10µA Min.
- 2. Contact Resistance : 500mΩ Max.
- 3. Insulation Resistance : 100MΩ Min. at DC 100V
- 4. Dielectric Strength : AC 250V for 1 Minute
- 5. Operating Force : 220⁺⁸⁰₋₇₀ gf
- 6. Stroke : 0.2^{+0.2}_{-0.1} mm
- 7. Life : 100,000 Cycles
- 8. Taping : 5,000 Pcs/Reel
- 9. Operating Temperature Range : -20~+70°C
- 10. Storage Temperature Range : -40~+85°C (Bulk)
: -20~+60°C (Taping)
- 11. Reflow soldering : According Reflow Profile
Max. 2 Times

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-2473	
ISSUED		CONFIRMED		HORNG CHIH 鴻琪股份有限公司 HCH ISO9001 Certified ISO14001 Certified		PART NO.	
John		Elvis				PTS-070	
2022.02.10		2022.02.10					