




4	Contactors	Phosphor Bronze	Silver Clad
3	Terminal	Brass	Silver Plate
2	Cap	Polycarbonate	
1	Box	Nylon	
No.	Parts	Material	Finish

Knob	Code	Knob	Code
Black	010	Gray	013
Red	011	Blue	015
White	012	Orange	018

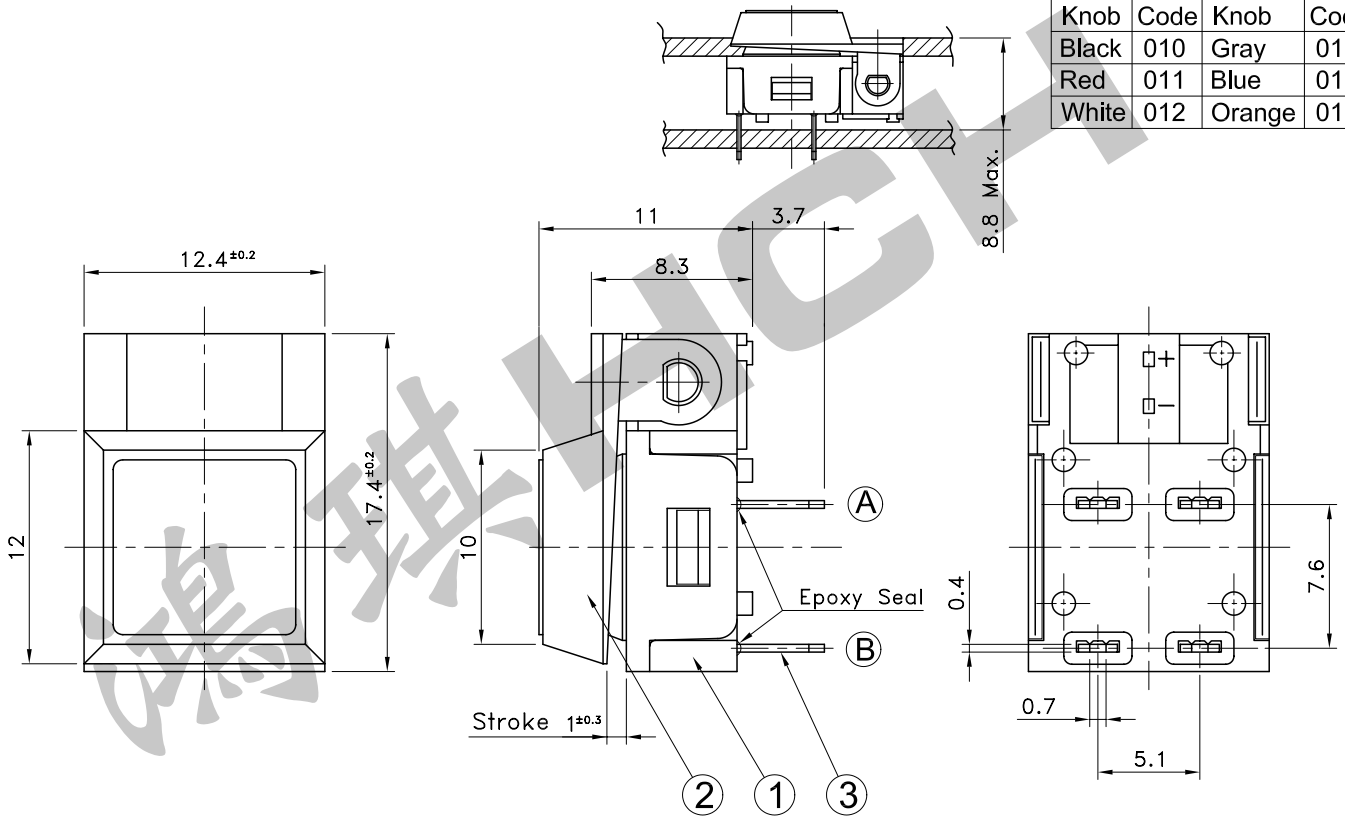

P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

SPECIFICATIONS

	Temperature (°C)	Time (Sec.)
Soldering	270±5	5 Max.

- |                                |                        |
|--------------------------------|------------------------|
| 1. Rating                      | :DC 24V 50 mA          |
| 2. Contact Resistance          | :20mΩ Max.             |
| 3. Insulation Resistance       | :100MΩ Min. at DC 250V |
| 4. Dielectric Strength         | :AC 250V for 1 Minute  |
| 5. Operating Force             | :95±30gf               |
| 6. Stroke                      | :1.0±0.3 mm            |
| 7. Life                        | :200,000 Cycles        |
| 8. Operating Temperature Range | :-25~+75°C             |

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.: HCH-403	
ISSUED		CONFIRMED		PART NO.		PTS-073	
 2003.07.03		 2003.07.03		<b>HCH</b> HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司			