



5	Contact	Stainless Steel	Ag Plating	
4	Stem	Nylon 6T		UL 94HB, Black
3	Bracket	Tin Plate	Sn Plating	
2	Terminal	Brass	Ag Plating	
1	Case	Nylon 46		UL 94HB, Ivory
No.	Name	Material	Finish	Remarks


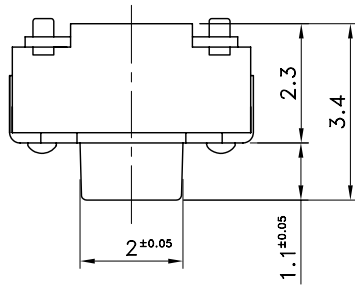


VIEW A

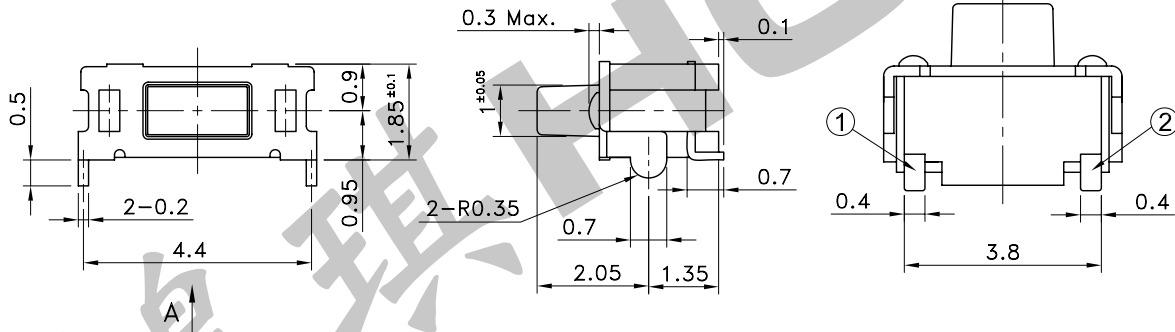


P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

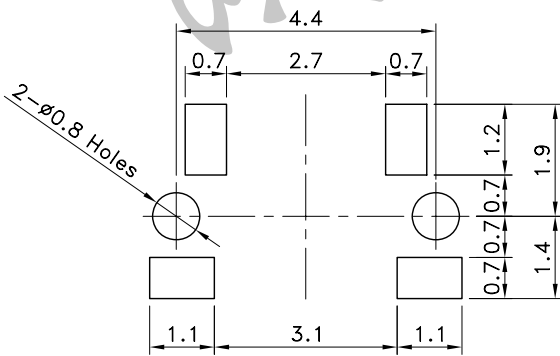

SOLDERING CONDITIONS

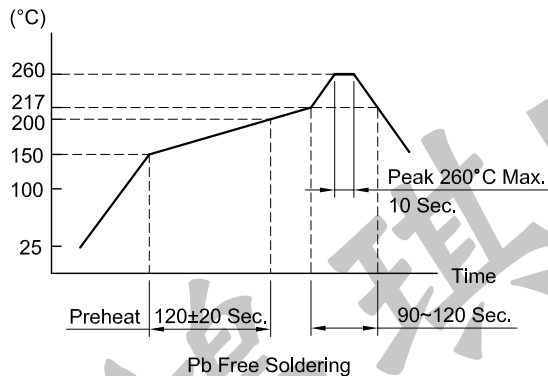

SPECIFICATIONS

- Rating : DC 12V 50mA
- Contact Resistance : 100mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 Minute
- Operating Force : 160±50gf
- Stroke : 0.2±0.1mm.
- Life : 50,000 Cycles
- Taping : 3,000 Pcs/Reel
- Operating Temperature Range : -20~+70°C
- Storage Temperature Range : -30~+80°C
- Reflow soldering : According Reflow Profile Max. 2 Times

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1260-5	
ISSUED		CONFIRMED		HCH HORNG CHIH ISO9001 Certified 鴻琪股份有限公司 ISO14001 Certified		PART NO.	
John		Elvis				PTS-094	
2009.07.08		2009.07.08					