




7	Metallic Cover		
6	Plunger	Polyphthalamide	94HB
5	Case	Polyphthalamide	94HB
4	Waterproof Sheet	Heat-resistant Polyimide Sheet	94V-0
3	Adhesive Sheet	Heat-resistant Polyimide Sheet	94V-0
2	Tact Spring	Stainless Strip	
1	Circuit Board	Bakelite	94V-0
No.	Parts	Material	Remarks

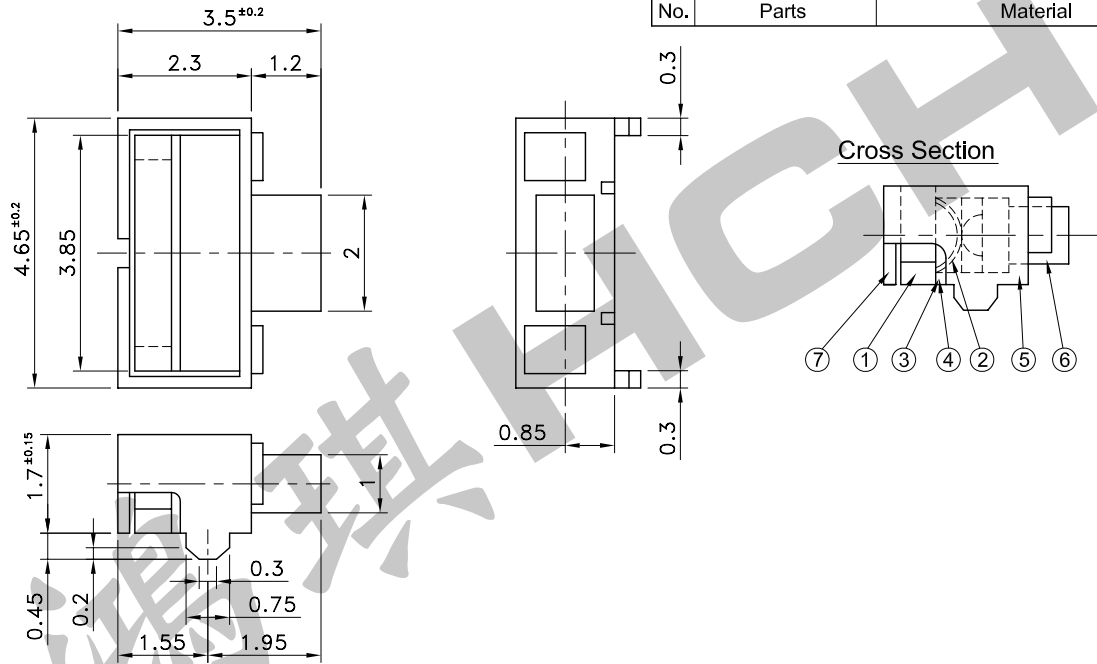


**P.C.B TERMINAL POSITION**

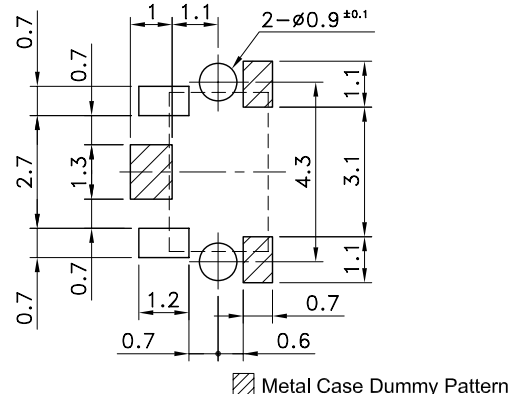

**SOLDERING CONDITIONS**

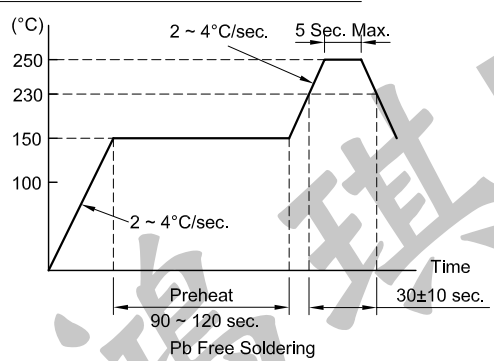

**CIRCUIT ARRANGEMENT**



**SPECIFICATIONS**

- Rating : DC 12V 20mA Max.
- Contact Resistance : 100mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 Minute
- Operating Force : 160±50gf
- Stroke : 0.2±0.1mm
- Life : 100,000 Cycles
- Package : 3,000Pcs/Reel
- Operating Temperature Range : -30~+80°C
- Storage Temperature Range : -40~+90°C
- Manual soldering : Tip Temperature 350°C Max. Soldering Time 3 Sec. Max.

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1403			
ISSUED	CONFIRMED	<b>HORNG CHIH</b> 鴻琪股份有限公司 ISO9001 Certified ISO14001 Certified		PART NO.			
John	Elvis			PTS-150			
2008.08.26	2008.08.26						