

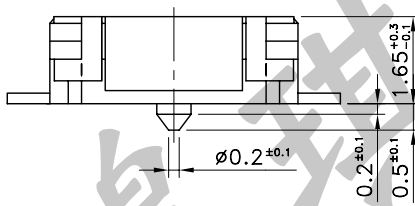
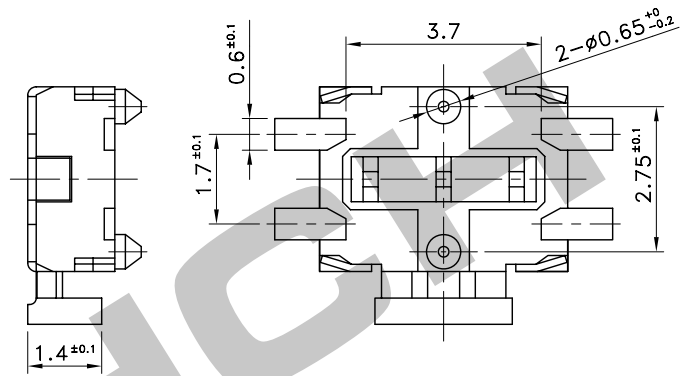
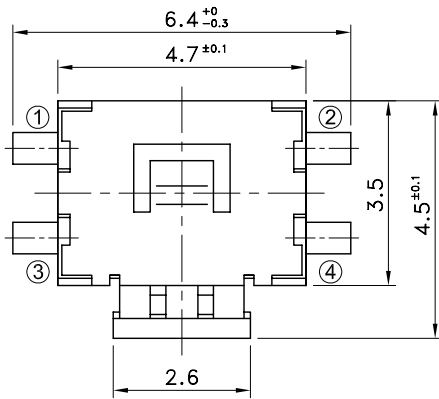


Part No.	Operating Force
PTS-170-A	160 ⁺⁷⁰ ₋₄₀ gf
PTS-170-B	220 ⁺⁸⁰ ₋₇₀ gf




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

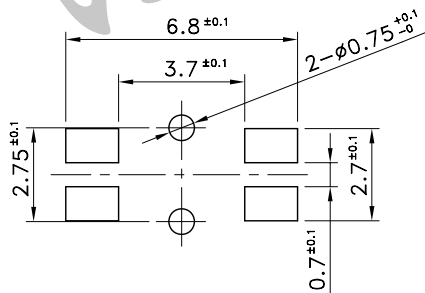

SOLDERING CONDITIONS

SPECIFICATIONS

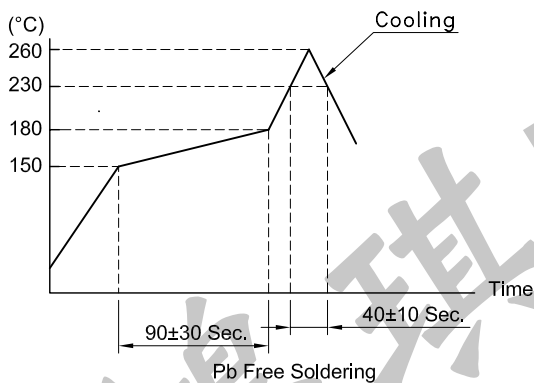

- Rating
- Contact Resistance : 500mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 Minute
- Stroke : 0.3^{+0.1}_{-0.2} mm
- Life : 100,000 Cycles
- Taping : 4,000 Pcs/Reel
- Operating Temperature Range : -20~+70°C
- Storage Temperature Range : -40~+85°C (Bulk)
: -20~+60°C (Taping)
- Reflow Soldering Profile : According Reflow Profile
2 Times
- Manual soldering : Tip Temperature 280°C Max.
Soldering Time 3 Sec. Max.

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-1663	
ISSUED		CONFIRMED		PART NO.		PTS-170	
John		Elvis		HCH [®] HORNG CHIH			
2010.05.25		2010.05.25		ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司			