




Part No.	L
PTS-177-R1	1.1 mm
PTS-177-R2	2.4 mm
PTS-177-R3	4.0 mm

VIEW A

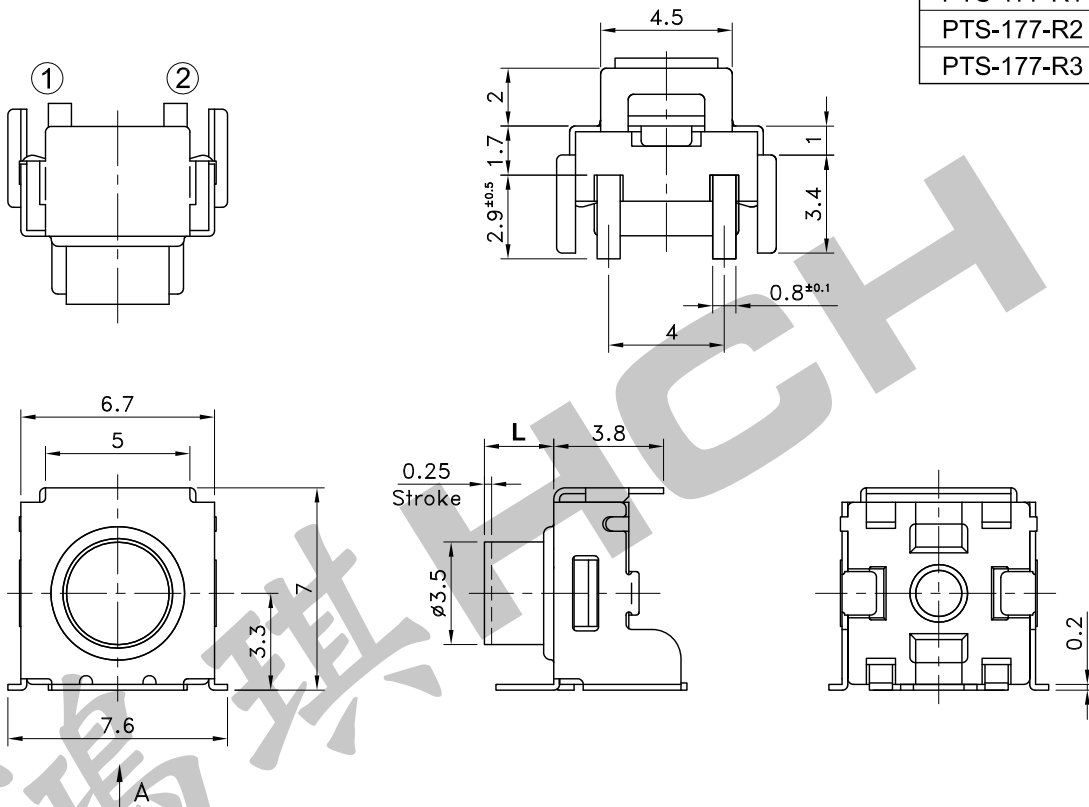


P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

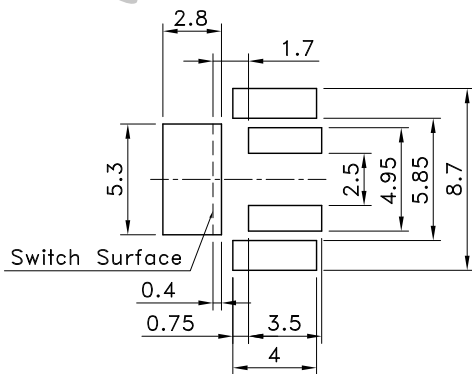

SOLDERING CONDITIONS

SPECIFICATIONS

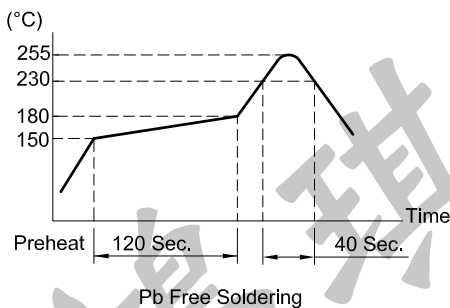

1. Rating : DC 32V 50 mA Max.
DC 5V 1 mA Min.
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Operating Force : 300±150 gf
6. Stroke : 0.25 mm
7. Life : 100,000 Cycles
8. Package : 500 Pcs/Reel
9. Operation Temperature Range : -40~+90°C
10. Storage Temperature Range : -40~+90°C
11. Reflow Soldering Profile : According Reflow Profile
2 Times
12. Manual soldering : Tip Temperature 350±5°C Max.
Soldering Time 3 Sec. Max.

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-1773
ISSUED	CONFIRMED	PART NO.	
<i>John</i>	<i>Elvis</i>	PTS-177	
2011.09.14	2011.09.14	HCH HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司	