



Part No.	Operating Force	Life	Stem Color
PTS-178-A	160±50gf	100,000 Cycles	Ivory
PTS-178-B	250±50gf	200,000 Cycles	Black

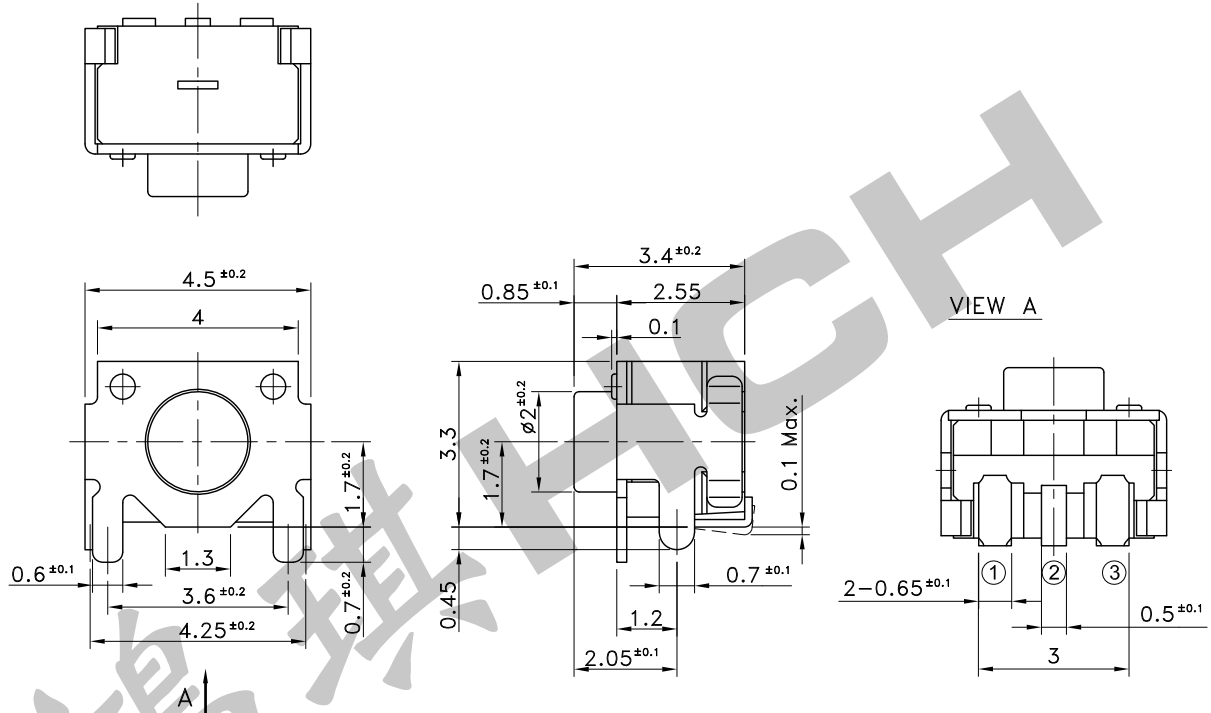


P.C.B TERMINAL POSITION

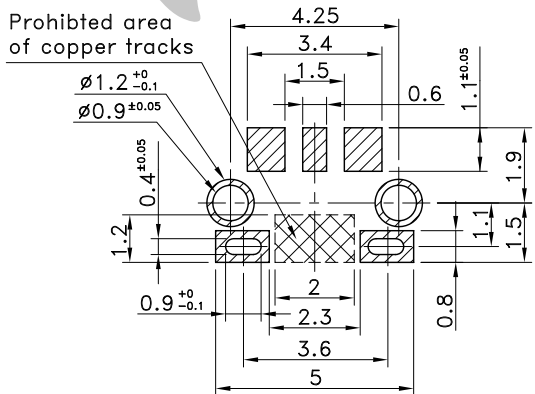


▨ Hatched area shows solder land

SOLDERING CONDITIONS

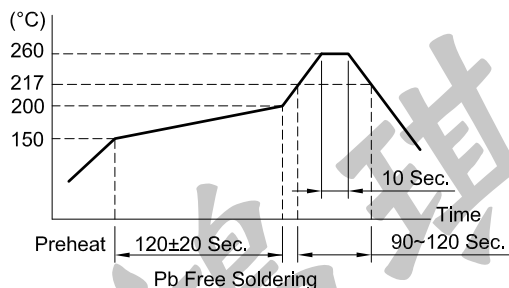

CIRCUIT ARRANGEMENT



SPECIFICATIONS

- Rating : DC 12V 50mA
- Contact Resistance : 500mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 minute
- Stroke : 0.2±0.1mm
- Taping : 1,800 Pcs/Reel
- Operating Temperature Range : -40~+85°C
- Storage Temperature Range : -40~+85°C
- Reflow soldering : According Reflow Profile Max. 2 Times

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-2035-4
ISSUED	CONFIRMED	PART NO.	
<i>John</i>	<i>Elvis</i>	PTS-178	
2020.08.20	2020.08.20	HCH ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司	