

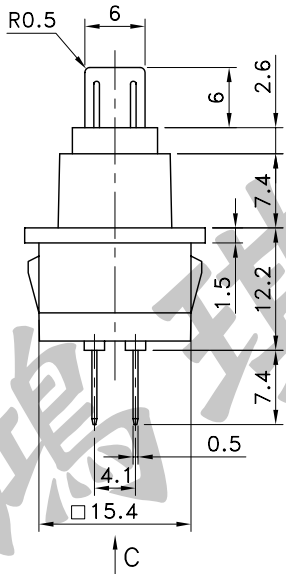



5	Contact Ball	Brass	Au Plating
4	Spring	Stainless	
3	Back PCB Terminal Assembly	Compose Resin , Brass	Ag Plating Assembly
2	Stem	Compose Resin	
1	Holder	Compose Resin	
No.	Parts	Material	Finish




P.C.B TERMINAL POSITION

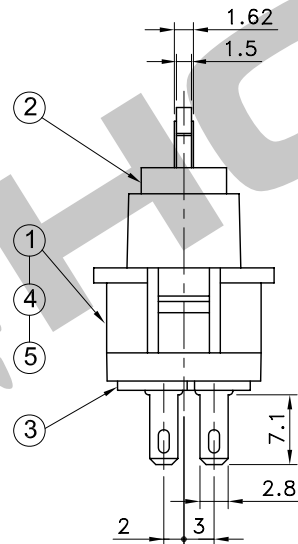

VIEW C



CIRCUIT ARRANGEMENT

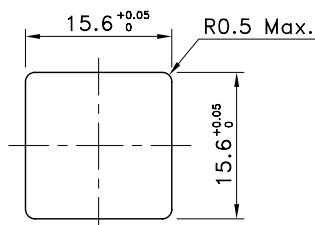

Panel Thickness: t1.2m

SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Manual Soldering	300	5

SPECIFICATIONS

- Rating : DC 24V 50mA
- Contact Resistance : 100mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 100V
- Dielectric Strength : AC 250V for 1 Minute
- Operating Force : 100±30gf
- Stroke : 2.5±0.3mm
- Life : 2,000,000 Cycles
- Operating Temperature Range : -10~+55°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1671			
ISSUED	CONFIRMED	 HCH HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司				PART NO.	
John	Elvis					PTS-194	
2010.06.07	2010.06.07						