




3	Contact	Stainless Steel	1	Silver Plate
3	Button	PBT Resin	1	Black
2	Terminal	Brass	4	Silver Plate
1	Box	PA Resin	1	Black
No.	Parts	Material	Q'ty	Finish

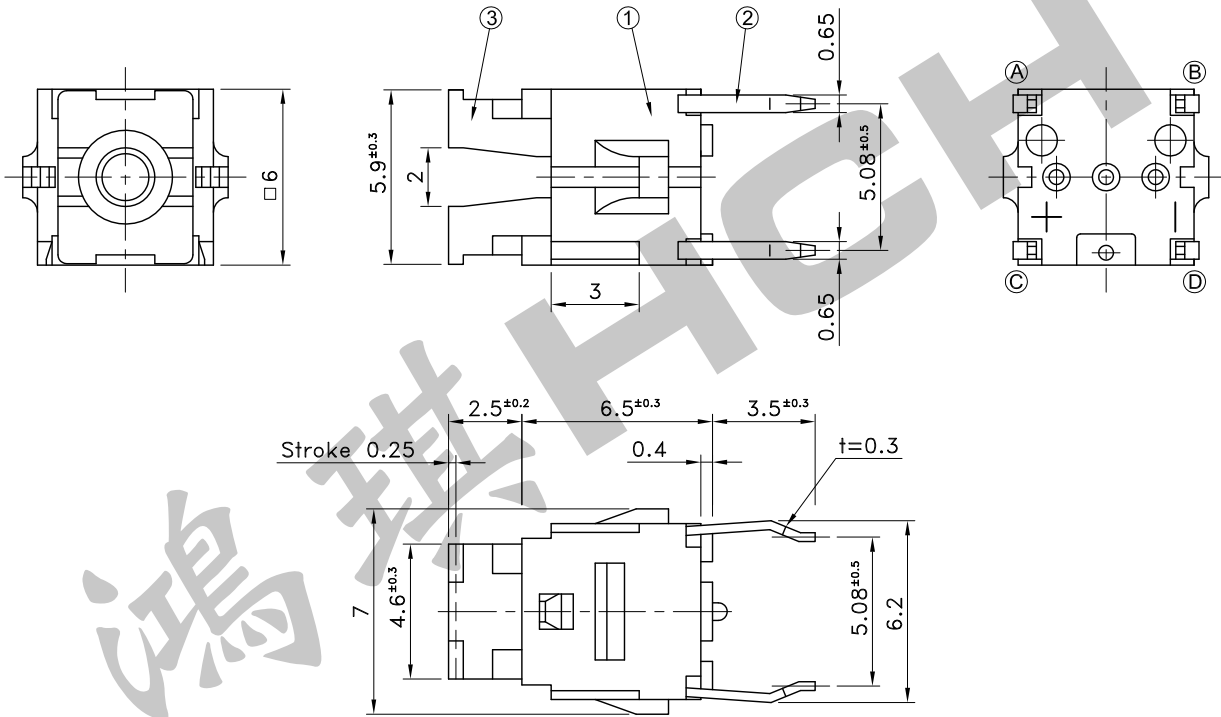

P.C.B TERMINAL POSITION



CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Auto Soldering	275 Max.	6 Max.
Manual Soldering	350 Max.	5 Max.

SPECIFICATIONS

1. Rating : DC 48V 50 mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Operating Force : 140±40gf
6. Stroke : 0.25mm
7. Life : 300,000 Cycles
8. Operating Temperature Range : -25~+70°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.: HCH-399	
ISSUED		CONFIRMED		HCH ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司		PART NO. PTS-205	
<i>John</i> 2003.06.19		<i>Joey</i> 2003.06.19					