


OA =Non Lock
 EE =Self Lock
 GR =Inter Lock
 RE =Reset
 Timing: S=Shorting
 N=Non-shorting


NO. OF KEY →

CIRCUIT ARRANGEMENT

Title	Push Button Switch		
No. of Key	1	2	3
Poles	8	8	8
Timing	N	N	N
Function	GR		
Plunger Color	White	White	White

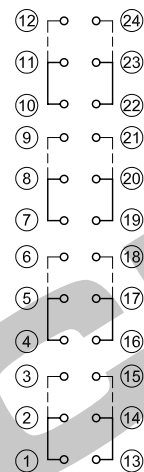

P.C.B TERMINAL POSITION

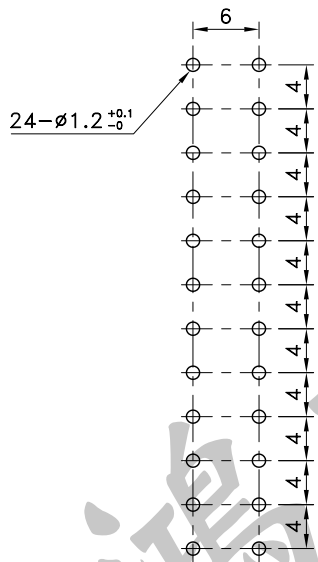

SPECIFICATIONS

- Rating : DC 30V 100mA
DC 25V 1A
- Contact Resistance : 50mΩ Max.
- Insulation Resistance : 100MΩ Min.
- Dielectric Strength : AC 1,000V for 1 Minute
- Operating Force : 750±150gf
- Stroke : Lock Stroke: 3.5^{+0.3} mm
Full Stroke: 4.8±0.5mm
- Life : 10,000 Cycles (DC 30V 100mA)
5,000 Cycles (DC 25V 1A)

REVISION: _____ DATE: _____ REVISION: _____ DATE: _____

UNIT:mm THIRD ANGLE PROJECTION METHOD TOL. UNLESS OTHERWISE STATED:±0.3 CODE NO.: HCH-1122-1

ISSUED	CONFIRMED	HORNG CHIH 鴻琪股份有限公司 <small>ISO9001 Certified ISO14001 Certified</small>	PART NO.
<i>John</i>	<i>Joey</i>		PTS-231
2008.12.23	2008.12.23		