




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

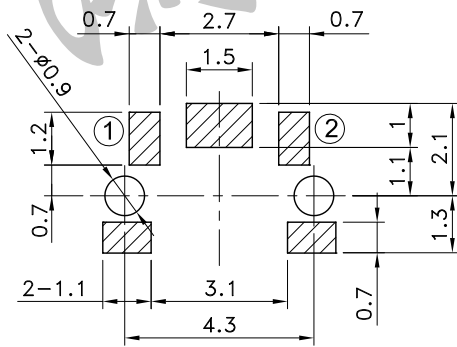

SOLDERING CONDITIONS

SPECIFICATIONS

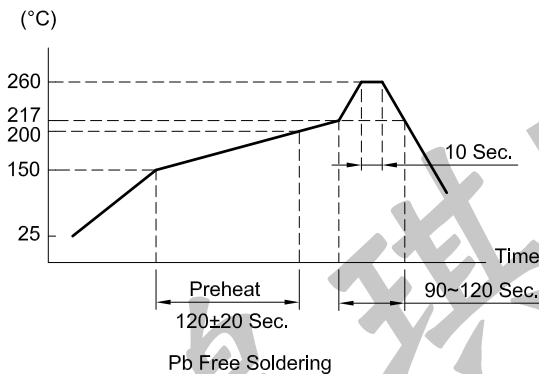

1. Rating : DC 12V 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric strength : AC 250V for 1 Minute
5. Operating Force : 180±50gf
6. Stroke : 0.2±0.1mm
7. Life : 100,000 cycles
8. Taping package : 3,000 Pcs/Reel
9. Operation Temperature Range : -20~+70°C
10. Storage Temperature Range : -30~+80°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-2535	
ISSUED		CONFIRMED		<b>HCH</b> ® HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司		PART NO.	
<i>John</i> 2025.05.06		<i>Elvis</i> 2025.05.06				<b>PTS-308</b>	