No.	Parts	Material	Finish	Remarks
5	Cover	Stainless Steel		
4	T/Case	PPA		UL94HB, Gray
3	Terminal	Brass	Ag Plating	
2	Slider	PPA		UL94HB, Yellow Green
1	Clip	Phosphor Bronze	Ag Clad	

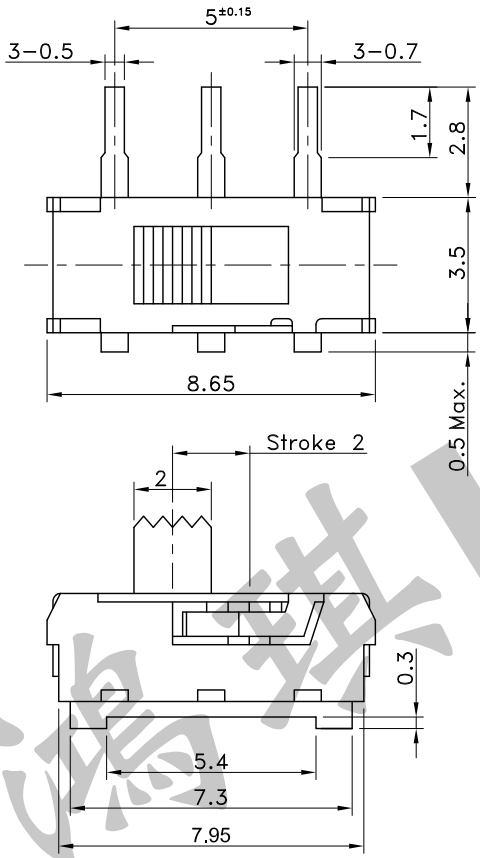

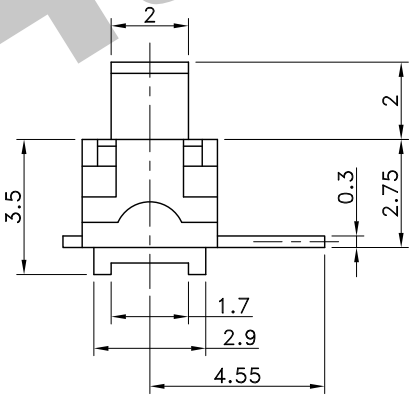

P.C.B TERMINAL POSITION



CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

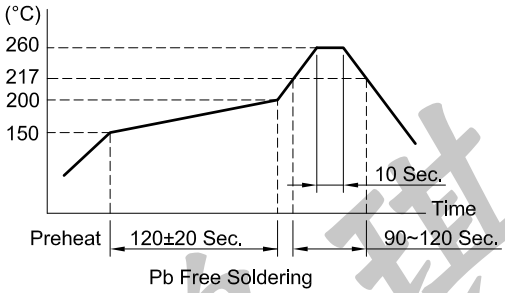

SPECIFICATIONS

1. Rating : DC 30V 300mA
2. Contact Resistance : 30mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 500V
4. Dielectric Strength : [Between Terminals] AC 800V for 1 Minute [Between Terminals and Earth] AC 1100V for 1 Minute
5. Operating Force : 150^{+100}_{-50} gf
6. Stroke : 2mm
7. Life : 10,000 Cycles
8. Operating Temperature Range : -10~+60°C
9. Reflow soldering : According Reflow Profile Max. 2 Times.

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-538-3

ISSUED	CONFIRMED		PART NO.
John 2010.12.24	Elvis 2010.12.24	HCH® ISO9001 Certified ISO14001 Certified HORNG CHIH 鴻琪股份有限公司	SST-1200

鴻琪 HCH