



P.C.B TERMINAL POSITION

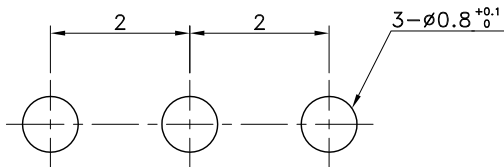

CIRCUIT ARRANGEMENT

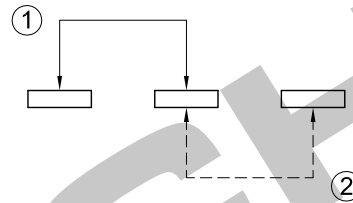

SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Manual Soldering	360 Max.	3 Max.

SPECIFICATIONS

1. Rating : DC 30V 300mA Max.  
DC 5V 10mA Min.
2. Contact Resistance : 20mΩ Max.
3. Insulation Resistance : 100MΩ Min.
4. Dielectric Strength : AC 500V for 1 Minute
5. Operating Force : 200±100gf
6. Stroke : 2 mm
7. Life : 5,000 Cycles

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.: HCH-1071-3	
ISSUED		CONFIRMED		<b>HCH</b> ISO9001 Certified ISO14001 Certified <b>HORNG CHIH</b> 鴻琪股份有限公司		PART NO.	
<i>John</i>		<i>Elvis</i>				<b>SST-1212</b>	
2016.06.23		2016.06.23					