



P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

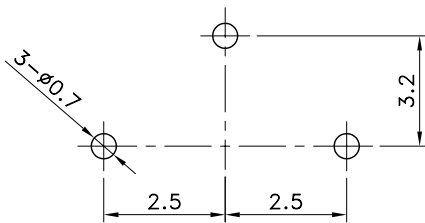

SOLDERING CONDITIONS

SPECIFICATIONS

	Temperature (°C)	Time (Sec.)
Auto Soldering	260±5	5±0.5
Manual Soldering	300±5	3 Max.

1. Rating : DC 6V 300mA
2. Contact Resistance : 70mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 500V
4. Dielectric Strength : AC 500V for 1 Minute
5. Operating Force : 200±100gf
6. Stroke : 2±0.1mm
7. Life : 10,000 Cycles
8. Operating Temperature Range : -10~+70°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1410		
ISSUED	CONFIRMED		<b>HCH</b> HORNG CHIH ISO9001 Certified 鴻琪股份有限公司 ISO14001 Certified			PART NO.	
<i>John</i>	<i>Elvis</i>					SST-1229	
2008.09.03	2008.09.03						