



P.C.B TERMINAL POSITION

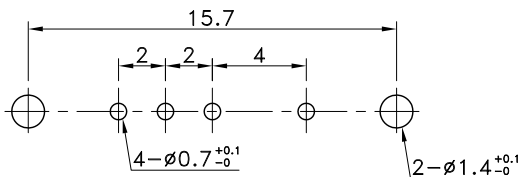

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Auto Soldering	260±5	5±1
Manual Soldering	350±10	3

SPECIFICATIONS

- Rating : DC 12V 200mA
- Contact Resistance : 30mΩ Max. at DC 5V 1A
- Insulation Resistance : 100MΩ Min. at DC 500V
- Dielectric Strength : [Between Terminals]
AC 800V for 1 Minute
[Between Terminals and Earth]
AC 1,100V for 1 Minute
- Operating Force : Side → Center: 100±50gf
Center → Side: 150±100gf
- Stroke : 2 mm
- Life : 10,000 Cycles
- Operating Temperature Range : -10~+60°C

REVISION:

DATE:

REVISION:

DATE:

UNIT:mm

THIRD ANGLE PROJECTION METHOD

TOL. UNLESS OTHERWISE STATED:±0.3

CODE NO.: HCH-1111-1

ISSUED

CONFIRMED

PART NO.

John

Elvis

HCH
ISO9001 Certified
ISO14001 Certified

HORNG CHIH

鴻琪股份有限公司

SST-1300

2023.02.02

2023.02.02