



P.C.B TERMINAL POSITION

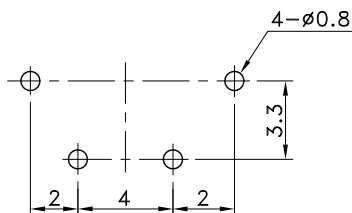

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Manual Soldering	380	3 Max.

SPECIFICATIONS

- Rating : DC 12V 200mA Max.  
DC 5V 10mA Min.
- Contact Resistance : 50mΩ Max. at AC 200μV 1.5mA
- Insulation Resistance : 100MΩ Min. at DC 500V
- Dielectric Strength : AC 500V for 1 Minute
- Operating Force : Side → Center: 150±100gf  
Center → Side: 250±150gf
- Stroke : 2 mm
- Life : 5,000 Cycles
- Operating Temperature Range : -10~+70°C
- Storage Temperature Range : -20~+80°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1847-1 (F)		
ISSUED	CONFIRMED		<b>HORNG CHIH</b> HONG CHIH 鴻琪股份有限公司 <b>HCH</b> ISO9001 Certified ISO14001 Certified			PART NO.	
<i>John</i>	<i>Elvis</i>					SST-1301	
2016.06.23	2016.06.23						