



P.C.B TERMINAL POSITION

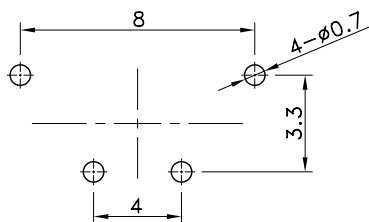

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Auto Soldering	240±5	5

SPECIFICATIONS

- 1. Rating : DC 6V 300mA
- 2. Contact Resistance : 70mΩ Max. at DC 5V 1A
- 3. Insulation Resistance : 100MΩ Min. at DC 500V
- 4. Dielectric Strength : AC 500V for 1 Minute
- 5. Operating Force : Side → Center:250±100gf
Center → Side:300±150gf
- 6. Stroke : 2mm
- 7. Life : 10,000 Cycles

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1077			
ISSUED	CONFIRMED	HORNG CHIH HCH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司				PART NO.	
John	Joey					SST-1306	
2006.05.30	2006.05.30						