
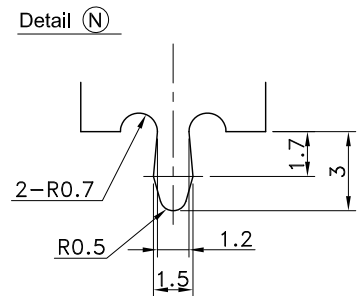
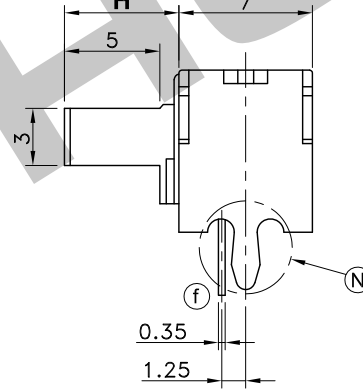
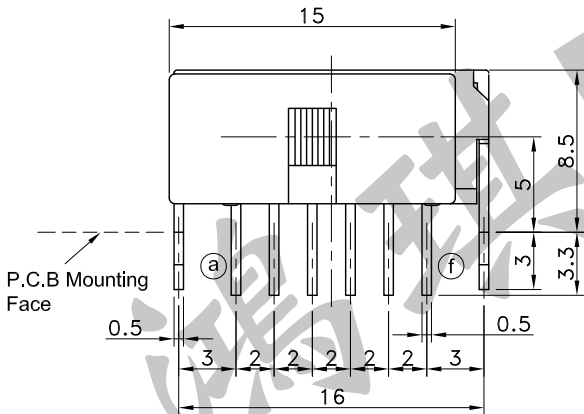



| | |
|----------|------|
| Part No. | H |
| SST-1401 | 6 mm |
| SST-1402 | 9 mm |



| Tolerances Unless Otherwise | |
|-----------------------------|------|
| L ≤ 10 | ±0.3 |
| 10 < L ≤ 100 | ±0.5 |
| 100 < L | ±0.8 |
| Angle | ±3° |

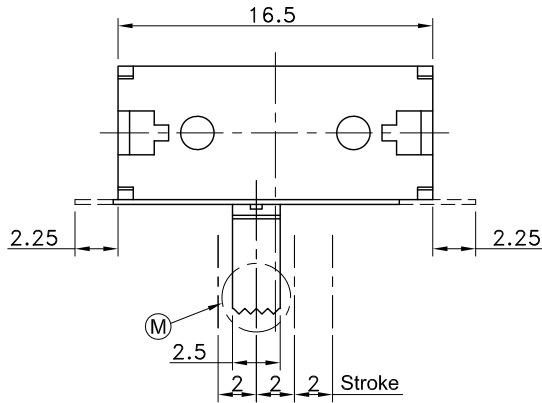

P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

Tolerance: ±0.05

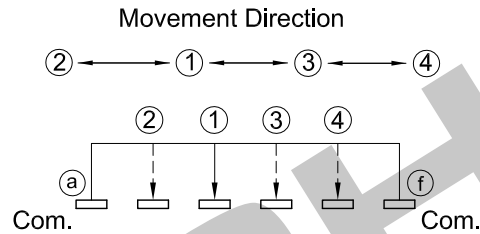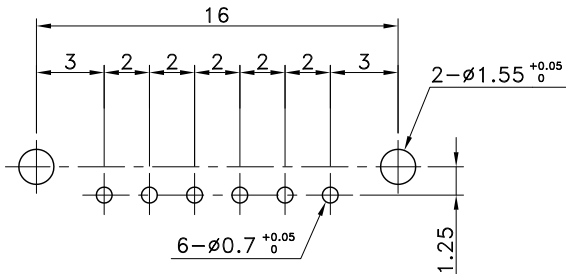

SOLDERING CONDITIONS

SPECIFICATIONS

| | Temperature (°C) | Time (Sec.) |
|------------------|------------------|-------------------------------|
| Auto Soldering | 260±5 | 5 ⁺⁰ ₋₁ |
| Manual Soldering | 350±10 | 5 Max. |

- Rating : DC 30V 100mA
- Contact Resistance : 25mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 500V
- Dielectric Strength : AC 500V for 1 Minute
- Operating Force : ①→②, ③→④ : 300±150gf
①→③, ③→① : 250±120gf
②→①, ④→③ : 200±100gf
- Stroke : 2mm
- Life : 10,000 Cycles
- Operating Temperature Range : -40~+85°C

| | | | |
|-------------|-------------------------------|-------------------------------|-------------------|
| REVISION: | DATE: | REVISION: | DATE: |
| UNIT:mm | THIRD ANGLE PROJECTION METHOD | TOL. UNLESS OTHERWISE STATED: | CODE NO.:HCH-2379 |
| ISSUED | CONFIRMED | PART NO. | |
| <i>John</i> | <i>Elvis</i> | SST-1401 | |
| 2020.10.21 | 2020.10.21 | SST-1402 | |
| | | HORNG CHIH 鴻琪股份有限公司 | |