



P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

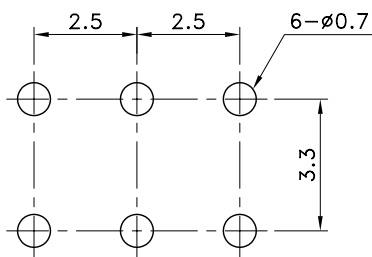

SOLDERING CONDITIONS

SPECIFICATIONS

	Temperature (°C)	Time (Sec.)
Auto Soldering	250±5	3
Manual Soldering	260	3

1. Rating : DC 6V 300mA
2. Contact Resistance : 60mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 500V
4. Dielectric Strength : AC 500V for 1 Minute
5. Operating Force : 200±100 gf
6. Stroke : 2.0±0.1mm
7. Life : 10,000 Cycles
8. Operating Temperature Range : -10~+60°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1413	
ISSUED		CONFIRMED		<b>HCH</b> ISO9001 Certified ISO14001 Certified <b>HORNG CHIH</b> 鴻琪股份有限公司		PART NO.	
<i>John</i>		<i>Elvis</i>				<b>SST-2227</b>	
2008.09.05		2008.09.05					