



P.C.B TERMINAL POSITION

VIEW OF PARTS INSTALL SIDE

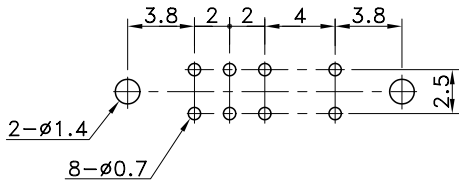

SOLDER HEAT RESISTANCE

SPECIFICATIONS

|                  | Temperature (°C) | Time (Sec.) |
|------------------|------------------|-------------|
| Auto Soldering   | 230±5            | 3±0.5       |
| Manual Soldering | 350±10           | 3           |

- Rating :DC 12V 100mA
- Contact Resistance :30mΩ Max.
- Insulation Resistance :100MΩ Min. at DC 500V  
AC 800V for 1 Minute  
[Between Terminals and Earth]  
AC 1100V for 1 Minute
- Dielectric Strength
- Operating Force :Side → Center: 200±100gf  
Center → Side: 250±100gf
- Stroke :2 mm
- Life :10,000 Cycles
- Operating Temperature Range :-10~+60°C

|            |                               |                                   |                   |
|------------|-------------------------------|-----------------------------------|-------------------|
| REVISION:  | DATE:                         | REVISION:                         | DATE:             |
| UNIT:mm    | THIRD ANGLE PROJECTION METHOD | TOL. UNLESS OTHERWISE STATED:±0.3 | CODE NO.: HCH-550 |
| ISSUED     | CONFIRMED                     | PART NO.                          |                   |
| John       | Joey                          | SST-2305                          |                   |
| 2003.11.07 | 2003.11.07                    | <b>HORNG CHIH</b><br>鴻琪股份有限公司     |                   |