



P.C.B TERMINAL POSITION

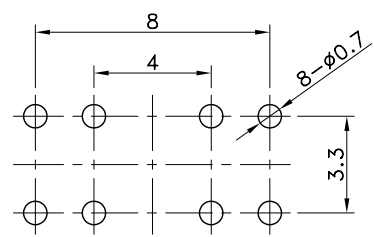

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Auto Soldering	260±5	3±0.5

SPECIFICATIONS

- 1. Rating : DC 6V 300mA
- 2. Contact Resistance : 50mΩ Max.
- 3. Insulation Resistance : 100MΩ Min. at DC 500V
- 4. Dielectric Strength : AC 500V for 1 Minute
- 5. Operating Force : Side → Center: 250±100gf
Center → Side: 300±150gf
- 6. Stroke : 2±0.1mm
- 7. Life : 10,000 Cycles
- 8. Operating Temperature Range : -10~+60°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1415			
ISSUED	CONFIRMED	HORNG CHIH HCH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司				PART NO.	
John	Elvis					SST-2318	
2008.09.11	2008.09.11						