

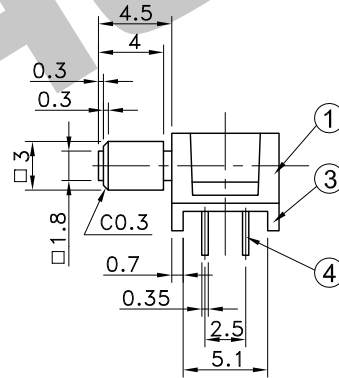
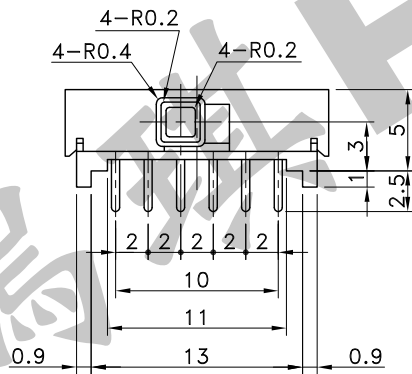


6	Spring Plate	t:0.1 Stainless	1		
5	Contact	t:0.06 Phosphor Bronze	4	Ag Clad	
4	Terminal	t:0.35 Brass	12	Ag Plating	
3	Base	Nylon G	1		94V-0, Black
2	Slider	Polyacetal G	1		94HB, Black
1	Housing	Polyacetal	1		94HB, Black
No.	Parts	Material	Q'ty	Finish	Remarks




P.C.B TERMINAL POSITION

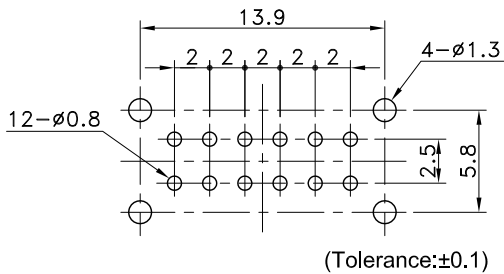

SOLDERING CONDITIONS

	Temperature (°C)	Time (Sec.)
Auto Soldering	250±5	5±1
Manual Soldering	300±5	3 Max.

CIRCUIT ARRANGEMENT



SPECIFICATIONS

- Rating : DC 30V 300mA
- Contact Resistance : 20mΩ Max.
- Insulation Resistance : 100MΩ Min. at DC 500V
- Dielectric Strength : AC 500V for 1 Minute
- Operating Force : 200±150gf
- Stroke : 2mm
- Life : 10,000 Cycles
- Operating Temperature Range : -10~+60°C

REVISION:	DATE:	REVISION:	DATE:
UNIT:mm	THIRD ANGLE PROJECTION METHOD	TOL. UNLESS OTHERWISE STATED:±0.3	CODE NO.:HCH-1986
ISSUED	CONFIRMED	PART NO.	
<i>John</i>	<i>Elvis</i>	SST-4206	
2014.10.22	2014.10.22	HCH [®] HORNG CHIH ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司	