



Part No.	Operating Force	Stroke
STS-014-A	160±50 gf	0.13±0.05 mm
STS-014-B	240±60 gf	0.13±0.05 mm
STS-014-C	330±100 gf	0.15±0.05 mm

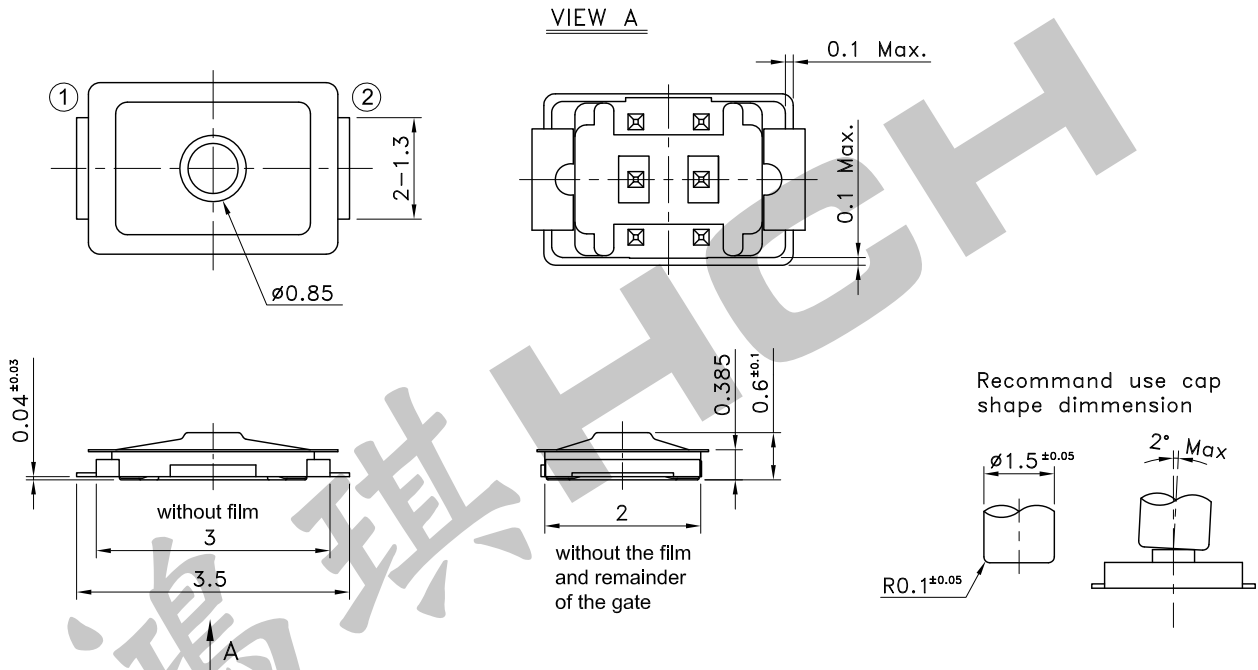


P.C.B TERMINAL POSITION




Soldering thickness : $t=0.08\pm0.01$

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

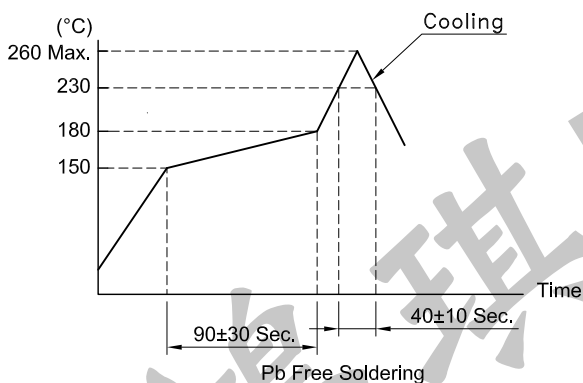

SPECIFICATIONS

1. Rating : DC15V 20mA (Max.)
: DC2V 10μA (Min.)
2. Contact Resistance : 500mΩ Max.
3. Insulation Resistance : 50MΩ Min. at DC 100V
4. Dielectric strength : AC 250V for 1 Minute
5. Life : 500,000 Cycles
6. Package : 10,000 Pcs/Reel
7. Operating Temperature Range : -40~+85°C
8. Storage Temperature Range : -40~+85°C (Bulk)
: -20~+60°C (Taping)
9. Reflow soldering : According Reflow Profile
Max. 2 Times.

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.05		CODE NO.: HCH-1889-1	
ISSUED		CONFIRMED		HORNG CHIH HCH <small>ISO9001 Certified</small> <small>ISO14001 Certified</small> 鴻琪股份有限公司		PART NO.	
<i>John</i>		<i>Elvis</i>				STS-014	
2017.10.02		2017.10.02					