




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT



REFLOW SOLDERING CONDITIONS

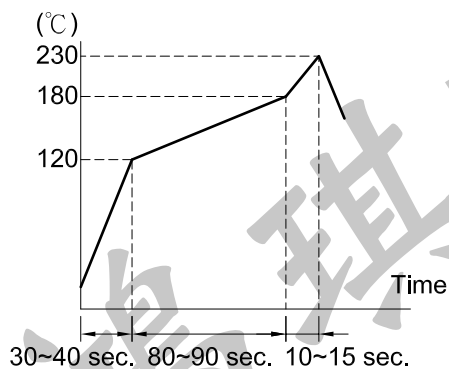

SPECIFICATIONS

- |                          |                        |
|--------------------------|------------------------|
| 1. Rating                | : DC 15V 20mA          |
| 2. Contact Resistance    | : 50mΩ Max.            |
| 3. Insulation Resistance | : 50MΩ Min. at DC 100V |
| 4. Dielectric Strength   | : AC 250V for 1 Minute |
| 5. Operating Force       | : 260±60gf             |
| 6. Circuit               | : SPST                 |
| 7. Stroke                | : 0.25±0.1mm           |
| 8. Life                  | : 1,000,000 Cycles     |
| 9. Taping                | : 2,000 Pcs/Reel       |

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-685	
ISSUED		CONFIRMED		<b>HCH</b> HORNG CHIH ISO9001 Certified 鴻琪股份有限公司		PART NO. <b>STS-03-B</b>	
<i>Elvis</i> 2003.04.24		<i>Joey</i> 2003.04.24					