


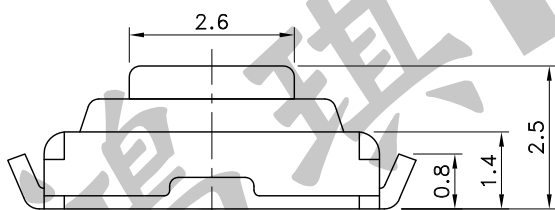
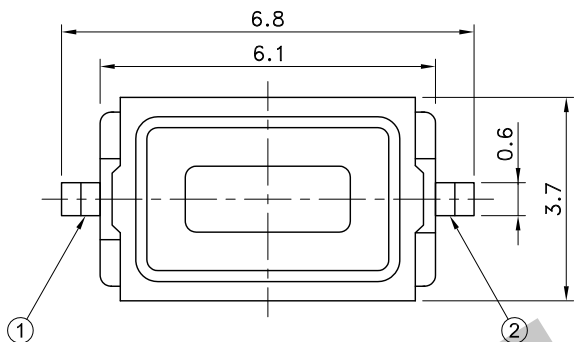


Part No.	Operating Force	Life
STS-04-B	160±50gf	50,000 Cycles
STS-04-BB	260±50gf	30,000 Cycles




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT

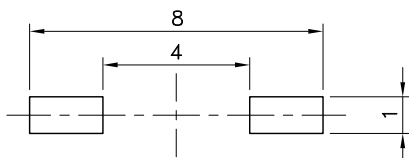

REFLOW SOLDERING CONDITIONS

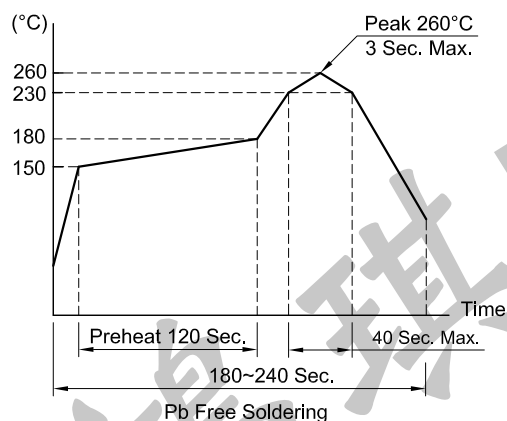

SPECIFICATIONS

1. Rating : DC 12V 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric Strength : AC 250V for 1 Minute
5. Circuit : 1Pole 1 Position
6. Stroke : 0.25±0.1mm
7. Taping : 3,000Pcs/Reel
8. Operation Temperature Range : -20~+70°C
9. Storage Temperature Range : -30~+80°C

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.2		CODE NO.:HCH-345-5	
ISSUED		CONFIRMED		<b>HORNG CHIH</b> <b>HCH</b> ISO9001 Certified ISO14001 Certified 鴻琪股份有限公司		PART NO.	
<i>John</i> 2017.03.28		<i>Elvis</i> 2017.03.28				<b>STS-04-B</b> <b>STS-04-BB</b>	