


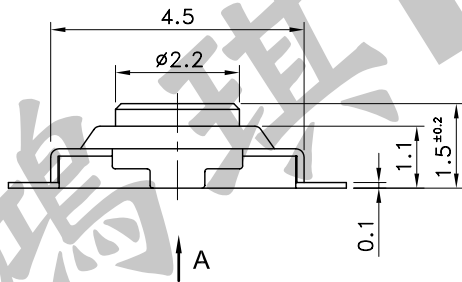
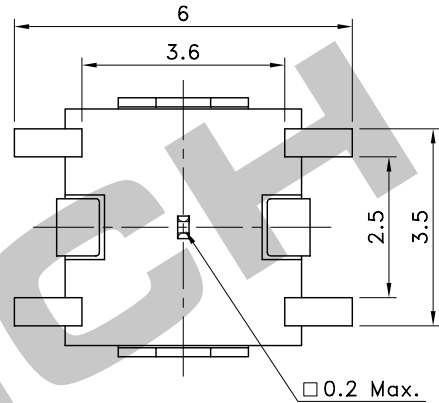


VIEW A




P.C.B TERMINAL POSITION

CIRCUIT ARRANGEMENT



SOLDERING CONDITIONS

SPECIFICATIONS

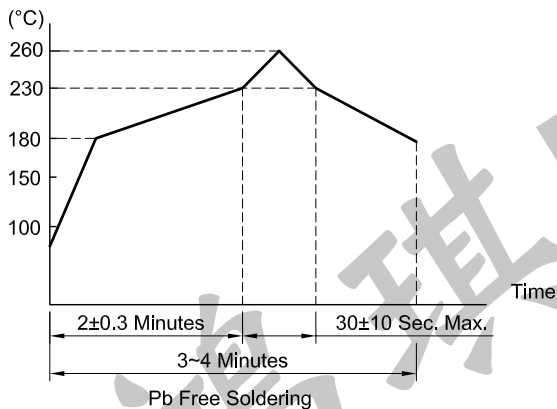

1. Rating : DC 12V 50mA
2. Contact Resistance : 100mΩ Max.
3. Insulation Resistance : 100MΩ Min. at DC 100V
4. Dielectric strength : AC 250V for 1 Minute
5. Operating Force : 260±50gf
6. Stroke : 0.2±0.1mm
7. Life : 100,000 Cycles
8. Taping package : 6,000 Pcs/Reel
9. Operation Temperature Range : -20~+70°C
10. Storage Temperature Range : -40~+85°C
11. Reflow soldering : According Reflow Profile Max. 2 Times

REVISION:		DATE:		REVISION:		DATE:	
UNIT:mm		THIRD ANGLE PROJECTION METHOD		TOL. UNLESS OTHERWISE STATED:±0.3		CODE NO.:HCH-1860	
ISSUED		CONFIRMED		PART NO.		ST-058-B	
John		Elvis		HCH® HORNG CHIH		鴻琪股份有限公司	
2012.11.12		2012.11.12		ISO9001 Certified ISO14001 Certified			